



GALVEX 18.08

Lightly alkaline liquid, antistatic effect, designed for degreasing and finishing of surfaces, prior to hot air drying.

COMPATIBILITY

- All metals, including sensitive metals

INGREDIENTS

- Surfactants, solubilising and chelating agents
- Phosphate free

PHYSICAL AND CHEMICAL DATA

- pH concentrated: 9.50
- pH (1%): 9.40
- Density: 1.082
- Surface tension: 21.8 mN/m

INSTRUCTIONS FOR USE

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 0.1 to 3%
- Temperature: 40 to 60°C (104 à 140°F)
- Time: 3 to 5 minutes

BENEFITS


- Protection of sensitive parts
- No residue after rinsing, spot-free drying
- Excellent surface preparation prior to PVD / CVD
- Antistatic effect

21/05/21

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

PROCESS EXAMPLE

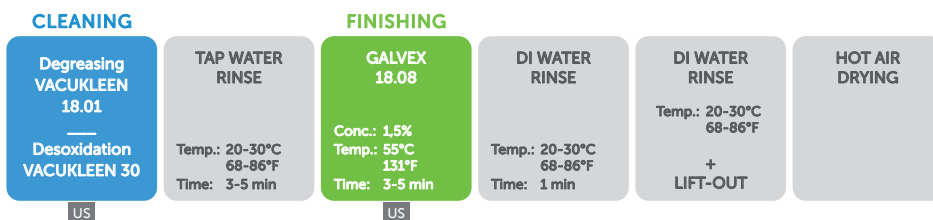

If you have any questions, please contact our Application Centre on: +41 22 365 46 66

