



# NGL 17.40 P. SP

Lightly alkaline powder, used for particular decontamination of surfaces, in ultrasonic processes.

## COMPATIBILITY:

- All metals

**Except:** aluminium, zamak

## INGREDIENTS:

- Surfactants, phosphates
- Chelating agents, corrosion inhibitors

## PHYSICAL AND CHEMICAL DATA:

- pH (3%): 9.3
- Surface tension: 28.8 mN/m

## INSTRUCTIONS FOR USE:


Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 5 to 20 g/l
- Temperature: 40 to 70°C (104 to 158°F)
- Time: 1 to 3 minutes

**Tip:** Always dilute the powder in hot water between 40 and 70°C (104 and 158°F)

## PROCESS EXAMPLE:

- Cleaning stainless steel or titanium prostheses / contamination: light oil, polishing compounds

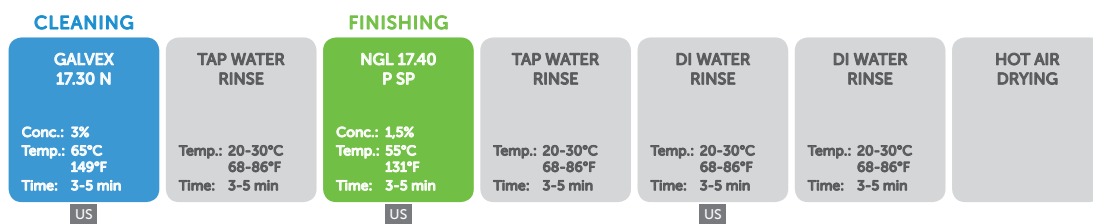

## BENEFITS:

- Perfect surface preparation before rhodium plating or vacuum deposition
- Excellent emulsifying of greasy substances
- Perfect wettability and rinsability
- Hydrophilic surface for a spot free finish

13/12/17

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

