



ADDITIF NF3

Liquid product for rapid removal of marker ink on organic and mineral glasses, by ultrasonic.

COMPATIBILITY MATERIALS:

- Low and high index organic glasses
- Mineral glasses

COMPONENTS:

- Solvating agents
- Surfactants

PHYSICO-CHEMICAL DATA:

- pH concentrated: n.m
- pH (1%): n.m
- Density: 0.973
- Surface tension: 28.0 mN/m

INSTRUCTIONS FOR USE:


Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 100% or 5 to 10% as an additive in a detergent
- Temperature: 20 to 55°C (68 to 131°F)
- Time: 2 to 10 minutes


Advice: do not exceed 30°C (86°F) if used at 100%. Ensure sufficient ventilation with an aspiration system above the working basin if possible.

PROCESS EXAMPLES:

- Cleaning photochromic moulds/ Elimination of marker inks:

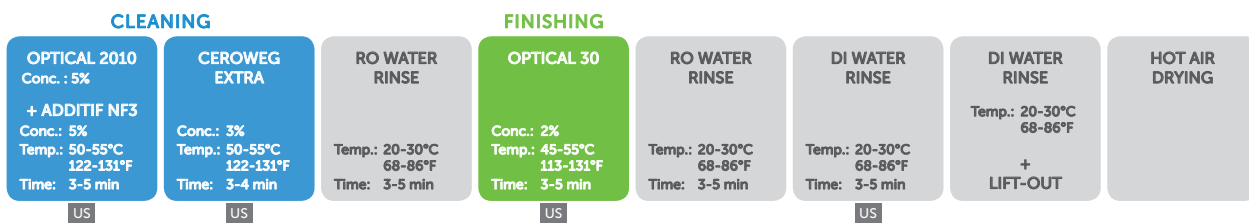

- Cleaning mineral or organic glasses after surface grinding and before inspection:

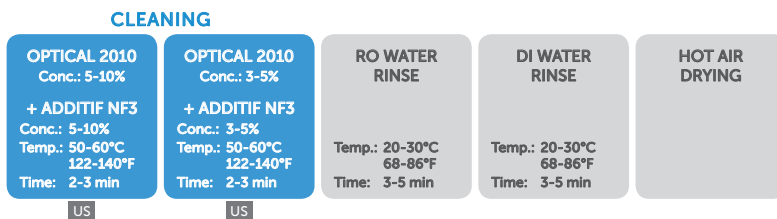

BENEFITS:

- Accelerator for removal of marker inks
- Used as an additive in alkaline solutions
- Compatible with organic and mineral glasses

09/08/17

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

