



# GALVEX 17.30 N

Liquid product, for complete removal of polishing compounds and slight oils in ultrasonic processes.

## COMPATIBILITY MATERIALS:

- Stainless steel
- Titanium
- Nitinol
- Ceramics, plastics

## COMPONENTS:

- Surfactants, solubilising agents
- Chelating agents

Product without phosphate

## PHYSICO-CHEMICAL DATA:

- pH concentrated: 10.5
- pH (1%): 10.1
- Density: 1.026
- Surface tension: 30.5 mN/m


## INSTRUCTIONS FOR USE:

used in the baths, as well as the type and quantity of contaminants.


- Concentration: 1 to 5%
- Temperature: 50 to 70°C (122 to 158°F)
- Time: 3 to 5 minutes

## PROCESS EXAMPLES:

- Cleaning stainless steel or titanium prostheses / Slight contamination, polishing compounds

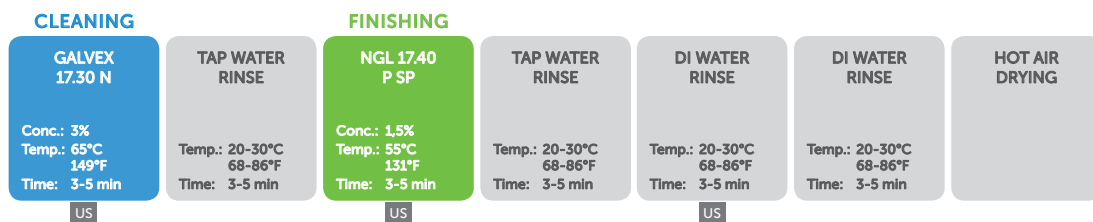

- Removes oil on all types of precision mechanics parts

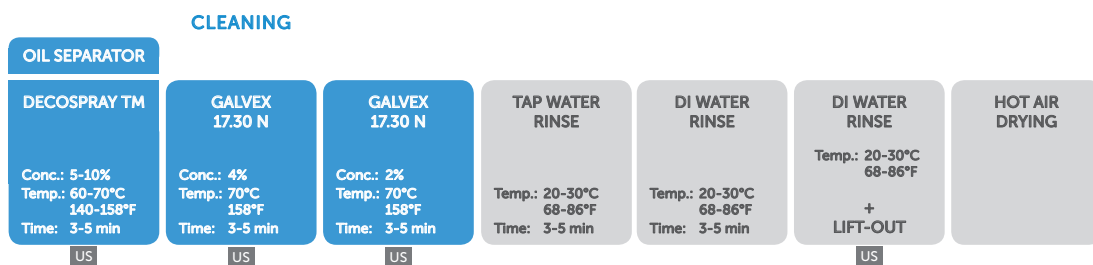

## BENEFITS:

- Excellent emulsifying properties
- Rapidly removes polishing compounds and oil residues
- Excellent surface preparation
- Long service life

24/08/17

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

