



# GALVEX 18.01

Lightly alkaline liquid, used in ultrasonic or immersion processes.

## COMPATIBILITY:

- All metals

## INGREDIENTS:

- Surfactants
- Chelating agents

## PHYSICAL AND CHEMICAL DATA:

- pH concentration: 9.6
- pH (1%): 9.3
- Density: 1.056
- Surface tension: 28.6 mN/m


## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.


- Concentration: 2 to 5%
- Temperature: 40 to 70°C (104 to 158°F)
- Time: 2 to 4 minutes

## PROCESS EXAMPLES:

- Cleaning of watchmaking supplies in Zamak, Aluminum, Brass, Silver: polishing compounds

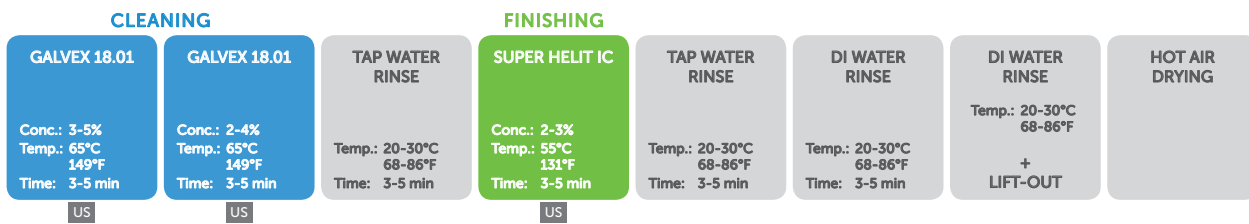

- Cleaning of indexes after deblocking

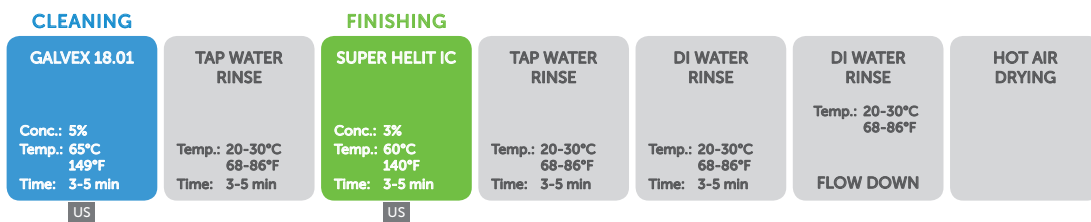

## BENEFITS:

- Complete removal of light oils, grinding oils polishing compounds and finger prints
- High efficiency on brushed, satin and stippled parts (complex geometry)
- Emulsifies and dissolves grease
- Perfect degreasing of parts
- Easily rinsed off, can be used as a finishing product
- Bright and spot-free finishing

29/08/17

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

