



FLUID TMS 60

Dewatering product used after cleaning and rinsing, and before solvent drying.

COMPATIBILITY:

- All metals

INGREDIENTS:

- Hydrocarbon
- Solvents

PHYSICAL AND CHEMICAL DATA:

- pH: non measurable
- Density: 0.805 g/mL
- Flash point: 64°C


INSTRUCTIONS FOR USE:

- Ready for use
- Room temperature
- Time: 30 sec. to 1 minute

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (high-density polyethylene).

PROCESS EXAMPLE:

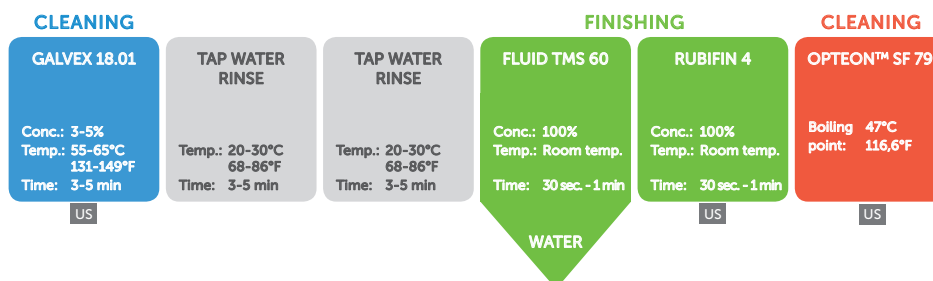

BENEFITS:

- Inter-operational protection against corrosion
- Fast separation and decantation of water
- Non-flammable according to CLP-CE 1272 GHS regulations
- Reduces water contamination of drying solvents
- Very high finish
- Perfect in hybrid processes
- Does not generate any contamination

15/01/18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

