



GALVANO™

Lightly alkaline liquid used for the removal of polishing compounds and oils, from all metals prior to electroplating, in ultrasonic processes.

COMPATIBILITY:

- All metals

INGREDIENTS:

- Tensioactives
- Chelating agents

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 10.1
- pH (1%): 9.6
- Density: 1.057
- Surface tension of concentrated chemical: 29.1 mN/m

INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 0.2 to 2%
- Temperature: 40 to 70°C (104 to 158°F)
- Time: 2 to 4 minutes


Tip: bath must be prepared with hot water (40°C / 104°F), before to add the product.

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

PROCESS EXAMPLE:

- Preparation prior to electroplating

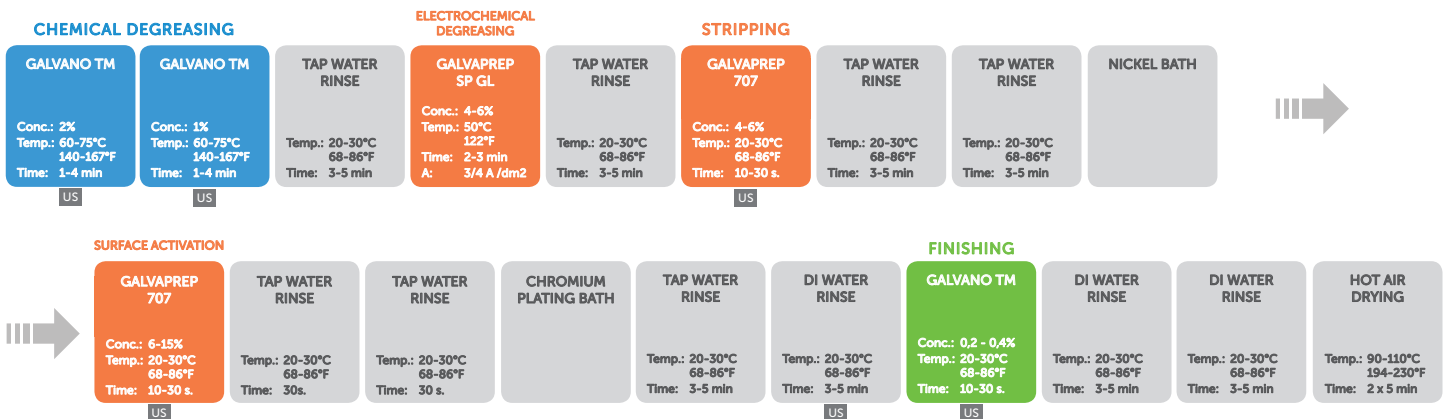

BENEFITS:

- Complete removal of light oils, grinding and polishing compounds, finger prints
- Cleaning of all metals in the same tank
- Galvanic corrosion inhibition between different metals and alloys
- Excellent emulsifying and solubilisation properties
- Perfect degreasing of parts
- Deoxidation of copper alloys
- Brighten surfaces
- Can be used in electroplating, as a chemical predegreasing
- Suitable for finishing, easy rinse off

12/01/18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

