



GALVEX 17.30 PLUS

Multi-purpose degreaser for ultrasonic or immersion processes.

COMPATIBILITY

- All metals except zinc and aluminium alloys

INGREDIENTS

- Surfactants, solubilising agents, chelating agents
- Phosphate and NTA-free
- VOC-free

PHYSICAL AND CHEMICAL DATA

- pH concentrated: 10.25
- pH (1%): 9.80
- Density: 1.035
- Surface tension: 29.9 mN/m

INSTRUCTIONS FOR USE

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 1 to 3%
- Temperature: 60 to 75°C (140 to 167°F)
- Time: 2 to 5 minutes

BENEFITS

- Complete and rapid removal of wax, oils and polishing compounds
- Excellent emulsifying and solubilisation of greases, contaminants dispersion
- Provides a temporary anti-corrosion film, due to surfactants agents that provide a temporary protective film
- Provides a hydrophobic surface
- Brightening effect of the surface on copper alloys


10/05/21

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

PROCESS EXAMPLE

- Preparation prior to PVD on electroplated items

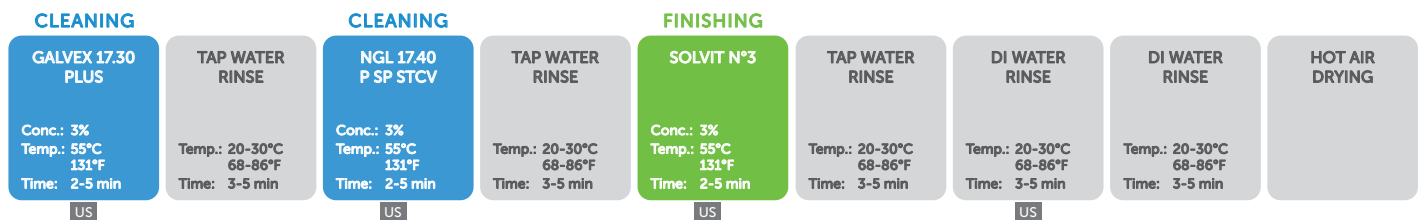

If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 // CH-1260 NYON // SWITZERLAND
+41 22 365 46 66 // contact@n-gl-group.com // www.n-gl-group.com

