



GALEX 18.07

Lightly alkaline liquid, antistatic effect, designed for degreasing and finishing of surfaces, prior to hot air drying.

COMPATIBILITY:

- All metals, principally sensitive metals

INGREDIENTS:

- Tensioactives, solubilising agents
- Phosphate free

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 9.2
- pH (1%): 8.90
- Density: 1.075
- Surface tension: 23,5mN/m

INSTRUCTIONS FOR USE:

The optimum conditions for use are affected by the quality of the water used in the baths and the type and quantity of contaminants.

- Concentration: 0.1 to 3%
- Temperature: 40 to 60°C (104 to 140°F)
- Time: 3 to 5 minutes

Tip: prepare baths with osmosed water or with demin. water

BENEFITS:

- Protection of sensitive parts
- No residue after rinsing, spot-free drying
- Excellent surface preparation prior to PVD/CVD
- Antistatic effect


26/03/21

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

PROCESS EXAMPLE:

- Cleaning of carbide cutting tools and sensitive steel:

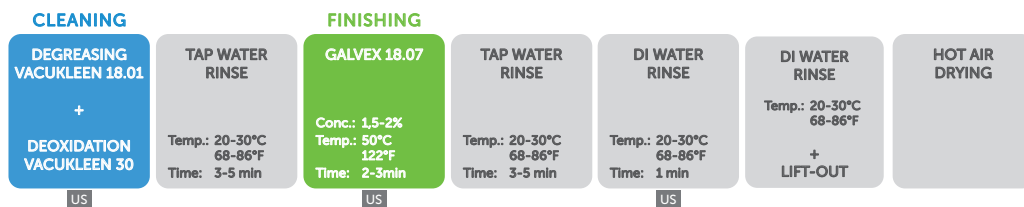

If you have any questions, please contact our Application Centre on: +41 22 365 46 66

