



GALEX 18.07

Lightly alkaline liquid, antistatic effect, designed for degreasing and finishing of surfaces, prior to hot air drying.

COMPATIBILITY:

- All metals, principally sensitive metals

INGREDIENTS:

- Tensioactives, solubilising agents
- Phosphate free

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 9.2
- Density: 1.075
- Surface tension: 23,5mN/m

INSTRUCTIONS FOR USE:


The optimum conditions for use are affected by the quality of the water used in the baths and the type and quantity of contaminants.

- Concentration: 0.1 to 3%
- Temperature: 40 to 60°C (104 à 140°F)
- Time: 3 to 5 minutes

Tip: prepare baths with osmosed water or with demin. water

PROCESS EXAMPLE:

- Cleaning of carbide cutting tools and sensitive steel:

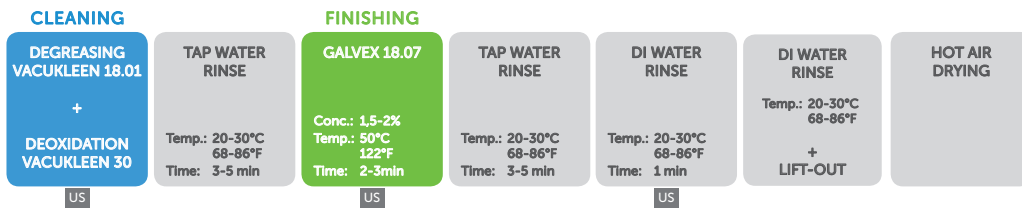

BENEFITS:

- Protection of sensitive parts
- No residue after rinsing, spot-free drying
- Excellent surface preparation prior to PVD/CVD
- Antistatic effect

15/01/18

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 // CH-1260 NYON // SWITZERLAND
+41 22 365 46 66 // contact@ngl-group.com // www.ngl-group.com



SWISS
QUALITY

