



GALVEX UNIVERSAL

Liquid product used to remove polishing compounds and adhesive residues in ultrasonic processes.

COMPATIBILITY:

- Gold
- Steel
- Copper and brass alloys

INGREDIENTS:

- Surfactants, chelating agents

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 10.3
- pH (1%): 9.8
- Density: 1.035
- Surface tension: 29.6 mN/m

INSTRUCTIONS FOR USE:


Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 1 to 4%
- Temperature: 60 to 75°C (140 to 167°F)
- Time: 2 - 5 minutes

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

PROCESS EXAMPLE:

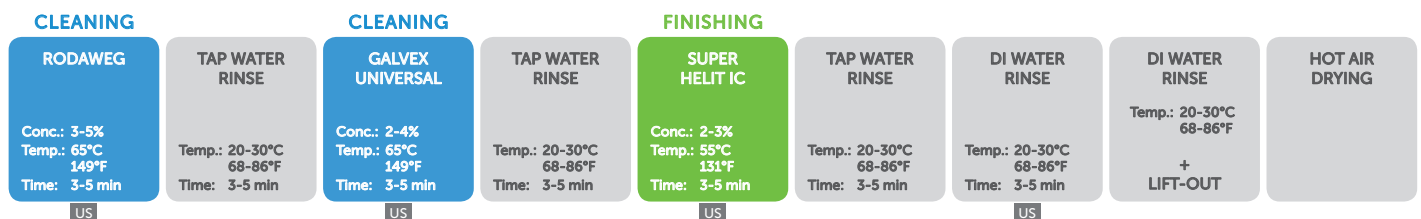

BENEFITS:

- Excellent emulsification and dissolving of greasy substances
- Perfect dispersion of dried contaminants even after a long storage period
- Effective on grained, brushed or satin-finished parts and in bar holes
- Spotfree finish
- Leaves a temporary film that protects the surface from oxidation
- Leaves a hydrophobic surface which facilitates the drying
- No oxidation of copper alloy

20/11/17



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

