



# SUPER GALVEX 001

Universal degreaser, slightly alkaline, used to remove light oils, polishing compounds and finger prints, in ultrasonic processes.

## COMPATIBILITY:

- Precious metals (gold, solid silver)
- Copper alloys, aluminium
- Decorative lacquers
- Zamak
- Stainless steel
- Titanium

## INGREDIENTS:

- Surfactants, dissolving agents
- Chelating agents

## PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 9
- pH (1%): 8.4
- Density: 1.066
- Surface tension: 28.9 mN/m

## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.


- Concentration: 1 to 5%
- Temperature: 50 to 70°C (122 to 158°F)
- Time: 3 to 5 minutes

Tip: Prepare baths with hot water between 45 and 50°C (113 and 122°F) before to add product.

## PROCESSE EXAMPLES:


- Leather and brass hardware: removal of polishing compounds and finger prints

### CLEANING

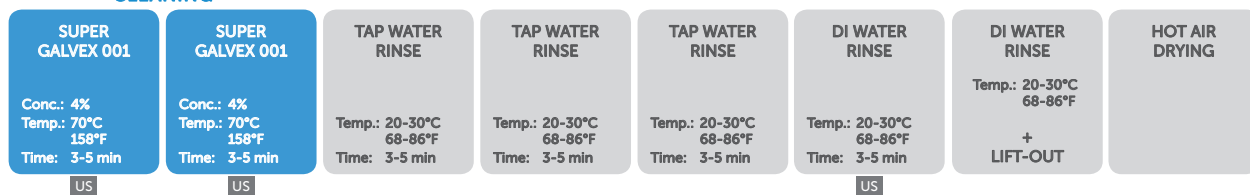

- Silver-plated brass / copper-nickel-zinc alloy: removal of buffing compounds

### CLEANING

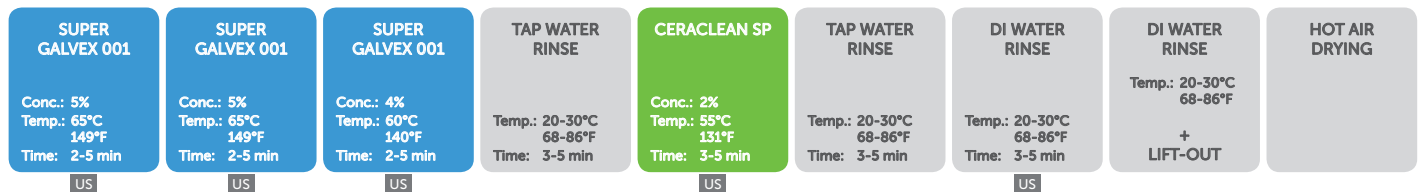

## BENEFITS:

- Perfectly suited for watchparts, jewellery, silverware
- Disperses contaminants
- Excellent emulsifying and dissolving of greasy substances
- Perfect degreasing of parts and super-finish of surfaces
- Excellent rinsability
- Shiny, spot-free surfaces, without oxidation

30/11/17

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

