



OPTICAL 10L

Slightly acid liquid used for finishing and preparation of lenses prior to vacuum metallisation, in ultrasonic cleaning.

COMPATIBILITY:

- Industrial glass (Mirrors)
- Flat glass
- Decorative lenses
- Ophthalmic lenses
- Quartz-Sapphire
- Solar panels

COMPONENTS:

- Organic acid, surfactants

No chelating agent

PHYSICO-CHEMICAL DATA:

- pH concentrated: 5.5
- pH (1%): 6.2
- Density: 1.275
- Surface tension: 30.1mN/m


INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 2 to 5%
- Temperature: 30 to 60°C (86 to 140°F)
- Time: 2 to 3 minutes

PROCESS EXAMPLE:

- Molds cleaning for CR39

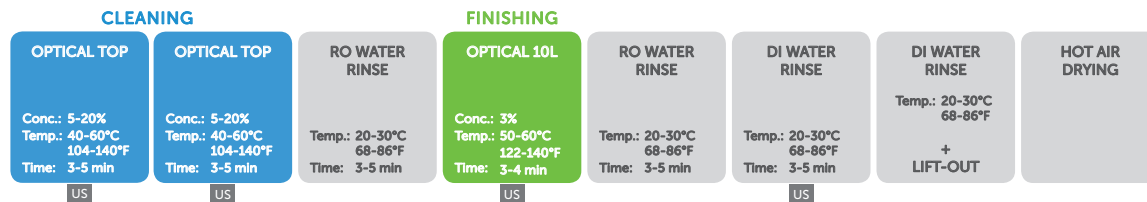

BENEFITS:

- Dispersion and solubilization of contaminants
- Perfect finishing of optical surfaces
- Easily rinsed off
- Allows excellent thin layer coating

02/03/18

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillièrre 7 // CH-1260 NYON // SWITZERLAND
+41 22 365 46 66 // contact@ngl-group.com // www.ngl-group.com



 SWISS QUALITY

