



DECOSPRAY TM

Slightly alkaline liquid used for ultrasonic or spray cleaning of metal.

COMPATIBILITY:

- All metals (except carbides)
- Synthetic materials

INGREDIENTS:

- Surfactants, phosphates
- Chelating agents

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 9.6
- pH (1%): 9.6
- Density: 1.125
- Surface tension: 39.7 mN/m

INSTRUCTIONS FOR USE:


Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 1 to 3%
- Temperature: 45 to 75°C (113 to 167°F)
- Time: 2-3 minutes

PROCESS EXAMPLES FOR ULTRASONIC AND SPRAY CLEANING:


- Ultrasonic cleaning: Removes oils on all types from micro-mechanical parts

CLEANING

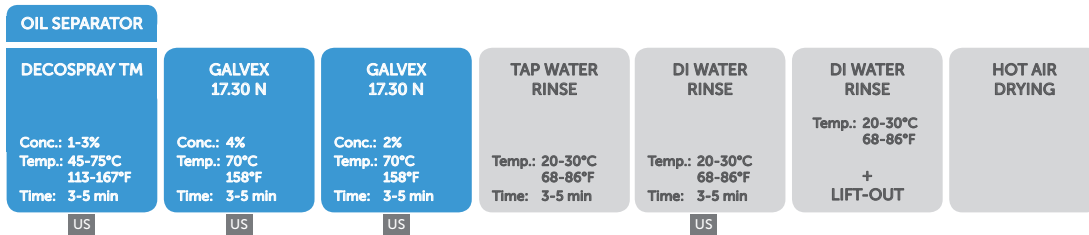

- Spray cleaning: Removal of oil from zinc-plated steel

CLEANING

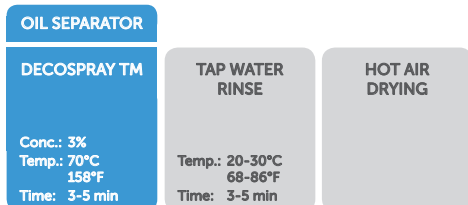

BENEFITS:

- Rapid and efficient separation of mineral oils for perfect degreasing (use an oil separator)
- Non-foaming product
- None-corrosive metal

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

12/07/18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 // CH-1260 NYON // SWITZERLAND
+41 22 365 46 66 // contact@ngl-group.com // www.ngl-group.com

