



# GALVEX 20.02

Lightly alkaline liquid, used for the removal of polishing compounds in ultrasonic or soaking processes.

## COMPATIBILITY:

- All metals except carbides

## INGREDIENTS:

- Surfactants
- Chelating agents

## PHYSICAL AND CHEMICAL DATA:

- pH concentration: 10.3
- pH (1%): 10.0
- Density: 1.030
- Surface tension: 27.7 mN/m


## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.


- Concentration: 2 to 5%
- Temperature: 40 to 70°C (104 to 158°F)
- Time: 2 to 5 minutes

## PROCESS EXAMPLES:

- Removal of polishing compounds on all metals

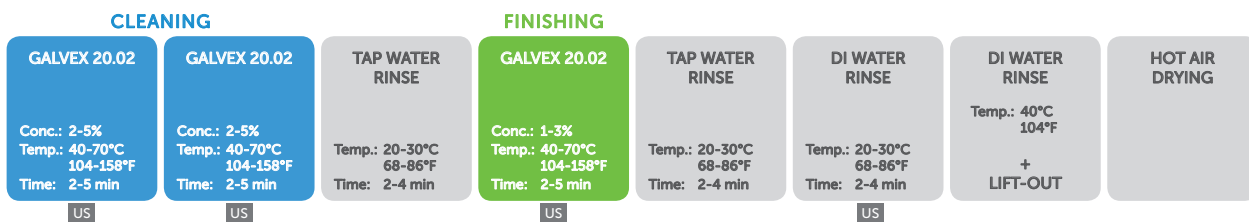

- Cleaning of watchmaking supplies in precious metal

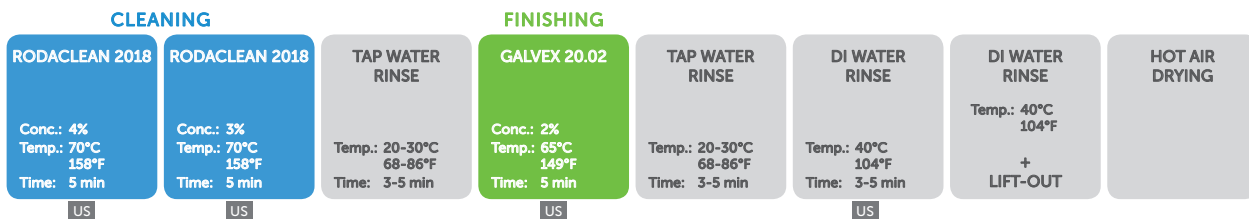

## BENEFITS:

- No harmful components
- Complete removal of polishing compounds, light oils, grinding oils and finger prints
- High efficiency on brushed, satin and stippled parts (complex geometry)
- Emulsifies and dissolves grease
- Perfect degreasing of parts
- Increases wettability
- Easily rinsed off, can be used as a finishing product
- Bright and spot-free finishing
- Long life of the baths

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

25/07/18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

