



# RODACLEAN 2018

Highly alkaline liquid product for removing oil or polishing compound residues in ultrasonic processes.

## COMPATIBILITY:

- Titanium
- Ceramics
- Steels/stainless steels

**Incompatibility:** aluminium, zamak, nickel silver and copper alloys

## INGREDIENTS:

- Strong alkalis, surfactants
- Chelating agents

## PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 14
- pH (1%): 12.5
- Density: 1.333
- Surface tension: 33.9 mN/m


## INSTRUCTIONS FOR USE:

The optimum conditions for use are affected by the quality of the water used in the baths and the type and quantity of contaminants.


- Concentration: 3 to 10%
- Temperature: 40 to 70°C (104 à 158°F)
- Time: 3 to 5 minutes

## PROCESS EXAMPLES:

- Cleaning of watch-making supplies / Pollution: polishing compounds

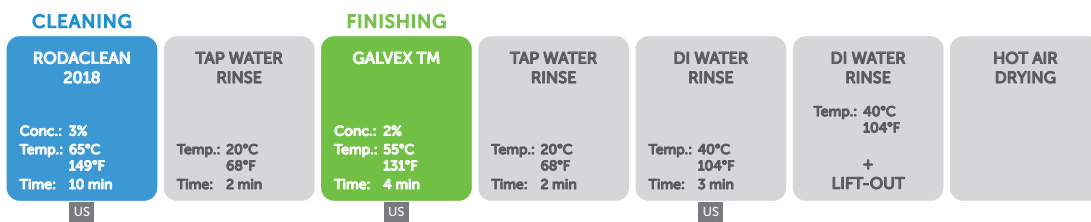

- Cleaning of stainless steel or titanium prosthetics / Pollution: oils, polishing compounds

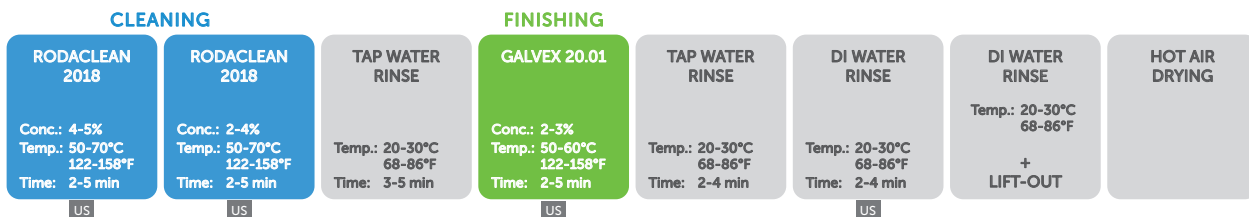

## BENEFITS:

- No harmful components
- Excellent preparation of surfaces after polishing and machining and before vacuum metallisation
- Effective on a wide range of polishing compounds
- Adapted for titanium (dental, medical and orthopaedic implants, dental and surgical implants)
- Efficient on dry contamination
- Perfect emulsification and solubilisation of greasy residues
- Increases wettability
- Long bath life

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

19/02/21



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

