



VACUKLEEN 18.01

Slightly alkaline liquid product, used in ultrasonic processes, for the removal of light oil, grinding oil, polishing compounds and fingerprints.

COMPATIBILITY:

- All metals

INGREDIENTS:

- Surfactants, complexing agents, anti-corrosion agents

PHYSICAL AND CHEMICAL DATA:

- pH concentrated: 9.2
- pH (1%): 8.7
- Density: 1.035
- Surface tension of concentrated chemical: 29.7 mN/m


INSTRUCTIONS FOR USE:

The optimum conditions for use are affected by the quality of the water used in the baths and the type and quantity of contaminants.

- Concentration: 1 to 5%
- Temperature: 40 to 70°C (104 to 158°F)
- Time: 2 to 5 minutes

PROCESS EXAMPLE:

- Cleaning cutting tools made out of carbide and sensitive steel

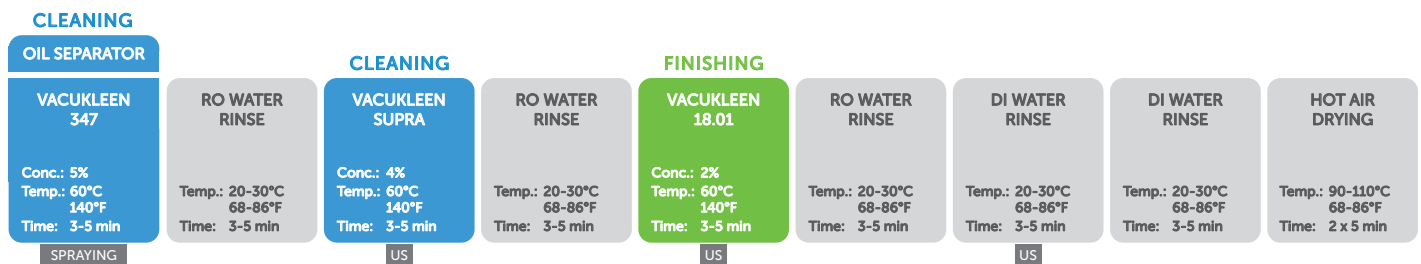

BENEFITS:

- Excellent preparation of surfaces prior to vacuum metallisation (P.V.D)
- Perfect grease removal and excellent finishing of surfaces
- Excellent emulsification and solubilization of greasy residues, and dispersal of contaminants
- Effective for ultrasonic use, on brushed, glossy and grained parts (holes on bars and parts with a complex geometry)
- Perfect bright and shining finish of parts

29/10/20

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

