



ADDITIF NF4

Liquid additive for quick removal of marking inks on organic and mineral lenses, in ultrasonic processes.

COMPATIBILITY:

- Low index lenses (CR39, Polycarbonate)
- High index lenses (1.6 - 1.7)
- Mineral lenses

COMPONENTS:

- Solvating agents
- Surfactants
- Alkalis

PHYSICO-CHEMICAL DATA:

- pH concentrated: 13.7
- pH (1%): 11.2
- Density: 0.980
- Surface tension: 28.3 mN/m

INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.


- Concentration: 100% or 5 to 10% as an additive in a detergent
- Temperature: 20 to 55°C (68 to 131°F)
- Time: 2 to 10 minutes

Advice: do not exceed 30°C (86°F) if used at 100%. Ensure sufficient ventilation with an aspiration system above the working basin if possible.

PROCESS EXAMPLE:

- Cleaning mineral or organic glasses after surface grinding and before inspection:

CLEANING

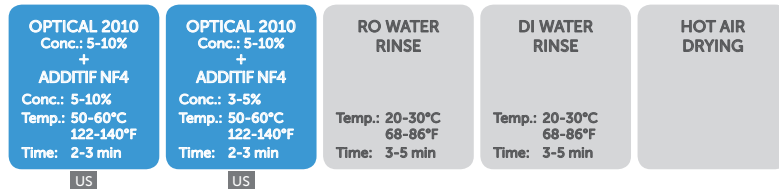

BENEFITS:

- Faster removal of marking inks on organic lenses
- Used as an additive in alkaline solutions
- Compatible with organic and mineral lenses

28/02/18

STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

