



# BIOPTIC 26

Alkaline liquid, used in ultrasonic processes to remove residues of cerium oxide, rosin and oils.

## COMPATIBILITY:

- Ophthalmic lenses (CR39)
- Quartz, sapphire
- Flat glass
- Decorative lenses
- Industrial glass (Mirrors)

## COMPONENTS:

- Strong alkalis, surfactants, phosphates
- Chelating and solubilising agents

## PHYSICO-CHEMICAL DATA:

- pH concentrated: 14
- pH (1%): 12.12
- Density: 1.255
- Surface tension: 27.4 mN/m


## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 3 to 5%
- Temperature: 60 to 70°C (140 to 158°F)
- Time: 3 minutes

## PROCESS EXAMPLE:

### CLEANING

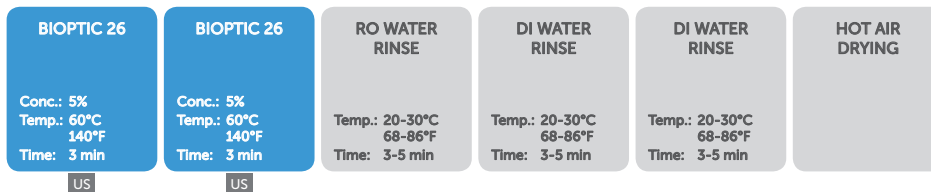

## BENEFITS:

- Effective on dried and persistent contaminations
- Rinses off well
- Can be used as a single product in the ultrasonic cleaning line

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

27/02/18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

