



# RODAWEG 2018

Liquid product, highly alkaline, for the total and rapid residues removal of grinding compounds, oils and light greases, in ultrasonic processes.

## COMPATIBILITY:

- Titanium
- Ceramic
- Steels/stainless steel

**Incompatibility:** aluminium, zamak, nickel silver and copper alloys

## INGREDIENTS:

- Strong alkalis, surfactants, phosphates
- Chelating agents

## PHYSICAL AND CHEMICAL DATA:


- pH concentrated: 14
- pH (1%): 12.6
- Density: 1.403
- Surface tension: 40.7 mN/m

## INSTRUCTIONS FOR USE:

The optimum conditions for use are affected by the quality of the water used in the baths and the type and quantity of contaminants.

- Concentration: 3 to 5%
- Temperature: 40 to 70°C (104 à 158°F)
- Time: 2 to 4 minutes

## PROCESS EXAMPLE:

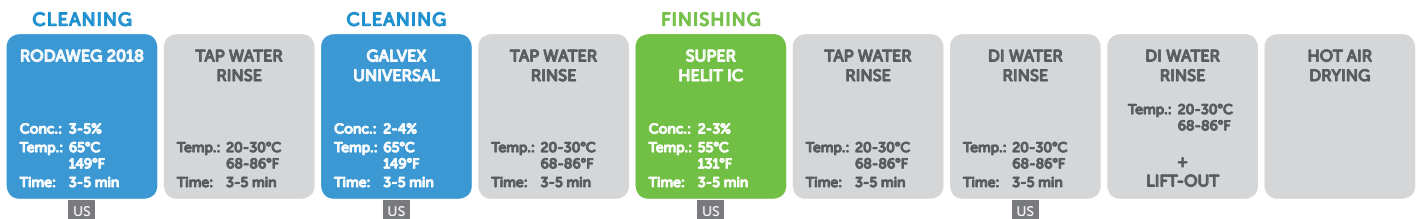

## BENEFITS:

- Removal of dried contaminants
- Emulsifies and dissolves grease
- Excellent surface wettability
- Perfect cleaning of parts prior to vacuum coating

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.

20/02/18



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

**NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS**

Chemin de la Vuarpillièrre 7 // CH-1260 NYON // SWITZERLAND  
+41 22 365 46 66 // contact@ngl-group.com // www.ngl-group.com



**SWISS QUALITY**

