



DECOFLOC 220

Coagulation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.



INDUSTRIAL WASTEWATER TREATMENT RANGE

PRODUCT TYPE

Coagulation agent (aluminium-based compound) in aqueous solution.


ASPECT

- Colourless liquid
- Water solubility: 100%


PHYSICOCHEMICAL DATA

- pH: 4.0
- Density: 1.2g/cm³

OPERATING PRINCIPLE

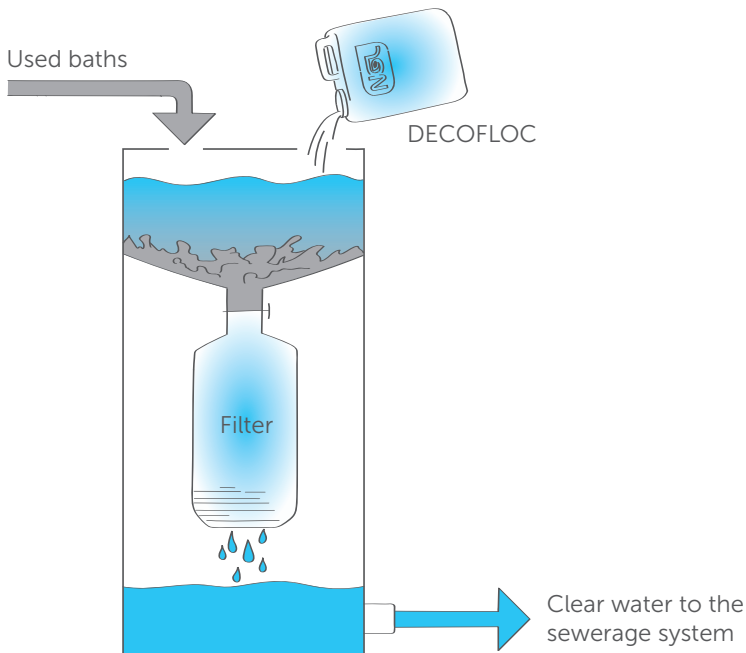

PROCESS EXAMPLE

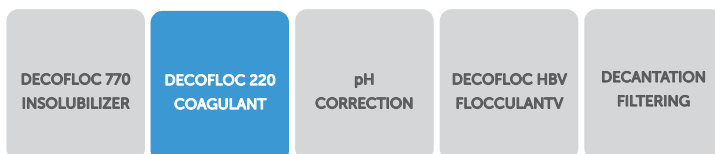

If you have any questions, please contact our NGL Water Technologies on: +41 22 365 46 66

BENEFITS

- Conformity of wastewater with legal requirements on heavy metals concentrations
- Used for the treatment of alkaline degreasing baths and polishing effluents

21/05/21

INSTRUCTIONS FOR USE

- Dosage: 1-5l/m³

STORAGE CONDITIONS

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 5l, 10l, 25l, barrel of 200l and container of 1000l.

