



# DECOFLOC 777

Heavy metals precipitation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.



## INDUSTRIAL WASTEWATER TREATMENT RANGE

### PRODUCT TYPE

Organo-sulfur based insolubilizer.


### ASPECT

- Orange liquid
- Water solubility: 100%

### PHYSICOCHEMICAL DATA

- pH (1%): 10.7
- Density: 1.108g/cm<sup>3</sup>

### OPERATING PRINCIPLE

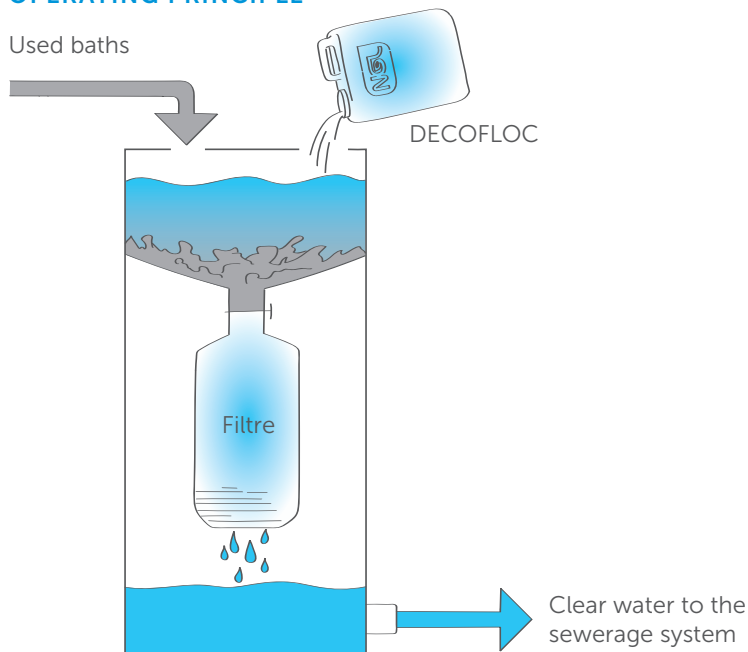

### PROCESS EXAMPLE



### BENEFITS

- Conformity of wastewater with legal requirements on heavy metals concentrations
- Also efficient with chelating agents in the wastewater

11/05/21

### INSTRUCTIONS FOR USE:

- Dosage: 0,1-2l/m<sup>3</sup>
- Reaction time: Minimum 15 min with stirring.

### STORAGE CONDITIONS

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 5l, 10l, 25l, drum of 200l and container of 1000l.



If you have any questions, please contact our NGL Water Technologies on: +41 22 365 46 66

**NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS**

Chemin de la Vuarpillière 7 // CH-1260 NYON // SWITZERLAND  
+41 22 365 46 66 // contact@ngl-group.com // www.ngl-group.com



**SWISS QUALITY**

