



DECOFLOC HBV

Flocculation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.



INDUSTRIAL WASTEWATER TREATMENT RANGE

PRODUCT TYPE

Liquid flocculation agent (organic polymer) in aqueous solution.


ASPECT

- Colourless liquid
- Water solubility: 100%

PHYSICOCHEMICAL DATA

- pH: 7.0
- Density: 1.000g/cm³

OPERATING PRINCIPLE

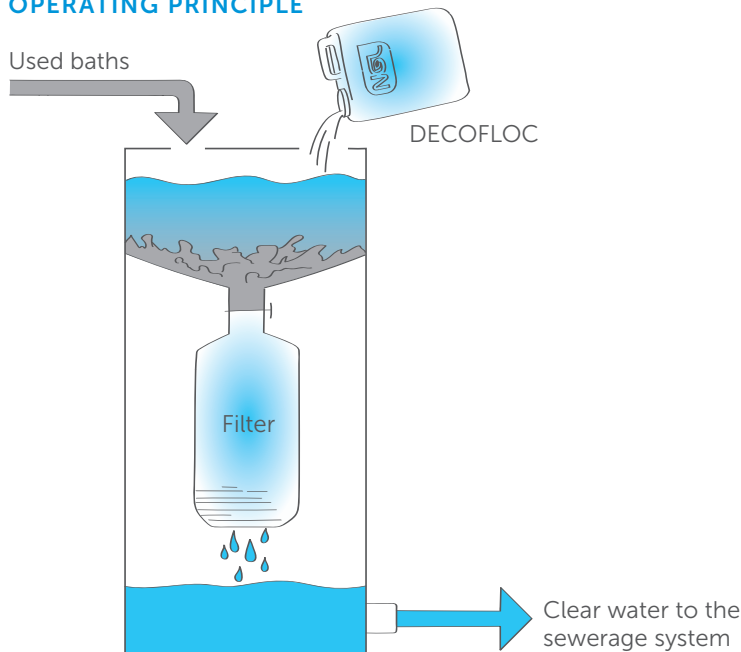

BENEFITS

- Product ready to use, requires no flocculant preparation
- Acts instantly
- Forms a thick sludge for better separation of impurities from treated water

11/05/21

INSTRUCTIONS FOR USE

- Dosage : 1-10l/m³ with slow stirring.

STORAGE CONDITIONS

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 5l, 10l, 25l, drum of 200l

PROCESS EXAMPLE



If you have any questions, please contact our NGL Water Technologies on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 // CH-1260 NYON // SWITZERLAND
+41 22 365 46 66 // contact@ngl-group.com // www.ngl-group.com

