



# DECOFLOC OPTIC

Flocculation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.



## INDUSTRIAL WASTEWATER TREATMENT RANGE

### PRODUCT TYPE

Liquid flocculation agent (organic polymer) in aqueous solution.


### ASPECT

- Solid/white
- Water solubility: 100%

### PHYSICOCHEMICAL DATA

- pH: n.m
- Density: n.m

### OPERATING PRINCIPLE

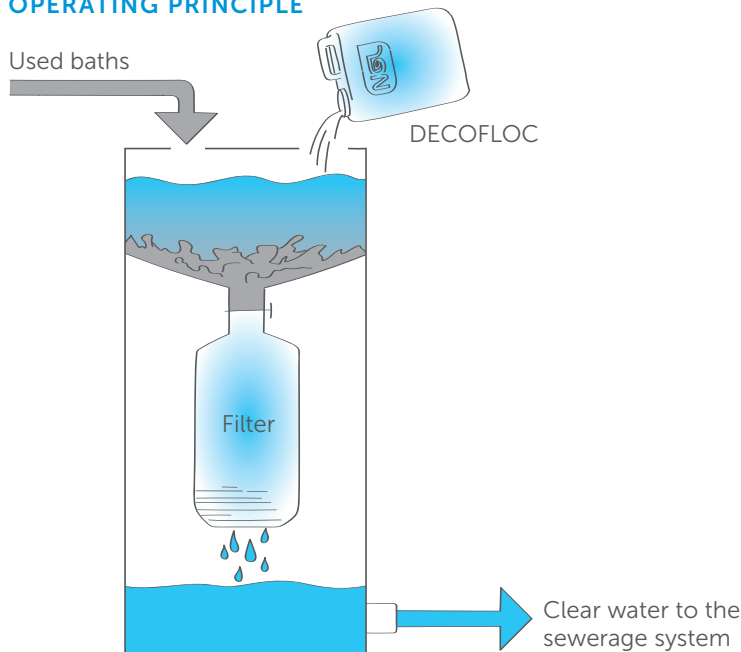

### BENEFITS

- Conformity of wastewater with legal requirements on heavy metals concentrations
- Product ready to use, requires no flocculant preparation

27/05/21

### INSTRUCTIONS FOR USE

- Dosage : 2-6g/m<sup>3</sup> with slow stirring.
- Used as flocculation agent for suspended matter in the form of solid sludge in addition to the coagulant DECOFLOC 110

### STORAGE CONDITIONS

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 1KG, 5KG, 10KG, 25KG.

### PROCESS EXAMPLE



If you have any questions, please contact our NGL Water Technologies on: +41 22 365 46 66

**NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS**

Chemin de la Vuarpillière 7 // CH-1260 NYON // SWITZERLAND  
+41 22 365 46 66 // contact@ngl-group.com // www.ngl-group.com

