



DECOFLOC PGL

Flocculation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.



INDUSTRIAL WASTEWATER TREATMENT RANGE

PRODUCT TYPE

Powder flocculation agent (organic polymer)


ASPECT

- White solid
- Water solubility: 100%

PHYSICOCHEMICAL DATA

- pH in aqueous solution 1%: 7.3
- Density: n.m

OPERATING PRINCIPLE

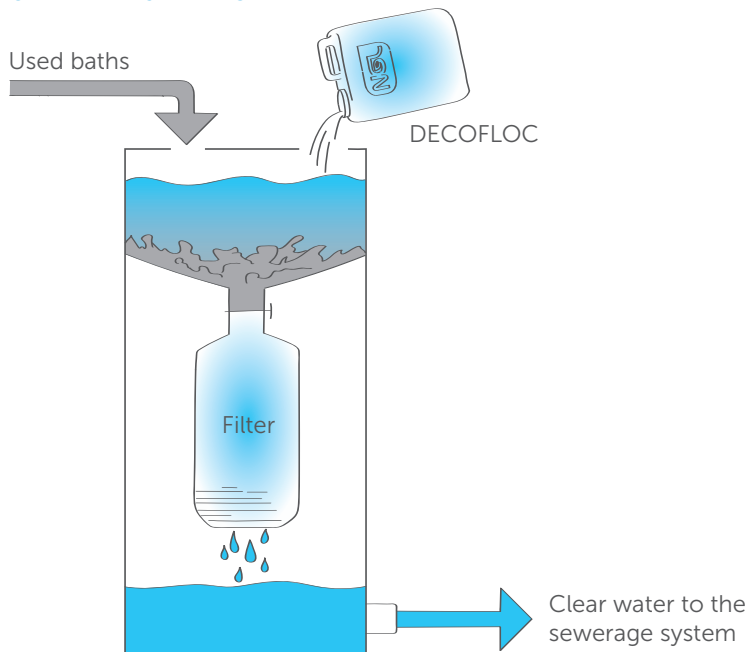

BENEFITS

- Concentration can be changed as required
- Compact and easy to store
- Long shelf life if stored in a dry place
- Can also be used without prior dilution

11/05/21

INSTRUCTIONS FOR USE

- Dosage : 1–6g/l in water.
- Vigorously stir for 1 to 2 hours at least, depending on the concentration.
- Add 1-10l per m³ of water to be treated.

STORAGE CONDITIONS

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 1KG, 5KG, 10KG, 25KG.

PROCESS EXAMPLE



If you have any questions, please contact our NGL Water Technologies on: +41 22 365 46 66

