



# DECOFLOC POUDRE 95

Flocculation agent for the treatment of industrial wastewater prior to disposal into the sewerage system.



## INDUSTRIAL WASTEWATER TREATMENT RANGE

### PRODUCT TYPE:

Multifunctional agent (coagulant, pH correction, flocculant).


### ASPECT

- Beige powder
- Water solubility: low

### PHYSICOCHEMICAL DATA

- pH in aqueous solution 1%: 10.4
- Density: n.m

### OPERATING PRINCIPLE

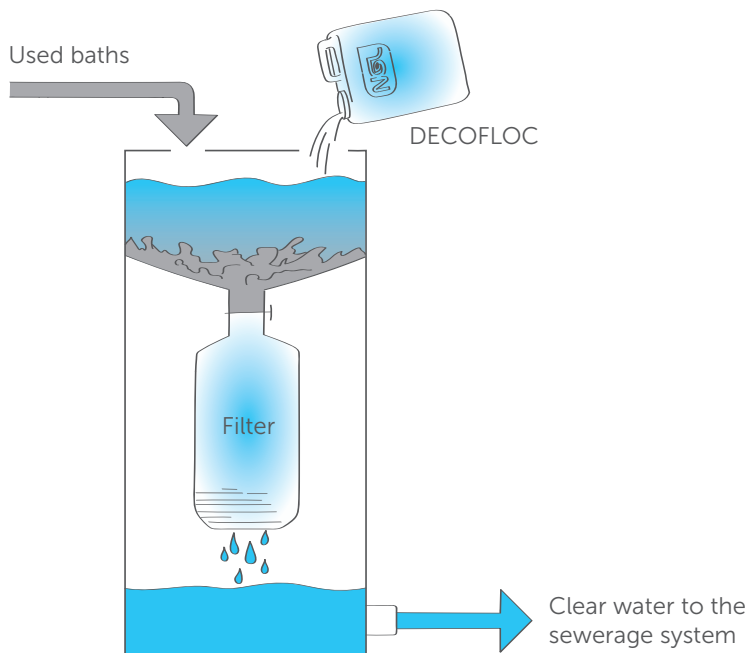

## BENEFITS

- Product ready to use, requires no flocculant preparation
- Combines coagulant and flocculant within single product
- Produces a stable sludge with good mechanical resistance

11/05/21


### INSTRUCTIONS FOR USE:

- Dosage: 1-5kg/m<sup>3</sup>, sieve the powder to break up lumps
- Reaction time: minimum 15 min. under shaker.

### STORAGE CONDITIONS

- Storage temperature between 5°C and 35°C (41°F and 95°F) in a dry place.
- Packaging in a can of 10KG.

### PROCESS EXAMPLE

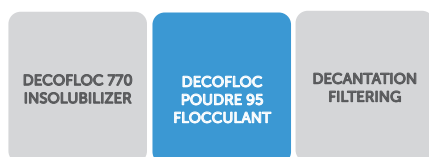

If you have any questions, please contact our NGL Water Technologies on: +41 22 365 46 66

**NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS**

Chemin de la Vuarpillière 7 // CH-1260 NYON // SWITZERLAND

+41 22 365 46 66 // [contact@ngl-group.com](mailto:contact@ngl-group.com) // [www.ngl-group.com](http://www.ngl-group.com)



**SWISS QUALITY**

