



# OPTICAL R25

Highly alkaline liquid, used to remove cerium oxide, colloidal silica and organic contaminants, in ultrasonic, spray or brush cleaning processes.

## COMPATIBILITY:

- Industrial glass (Mirrors)
- Flat glass
- Decorative lenses
- Liquid Crystal Display (LCD)
- Quartz-Sapphire
- Solar panels

## COMPONENTS:

- Strong alkalis, surfactants
- Chelating agents free**

## PHYSICO-CHEMICAL DATA:

- pH concentrated: 13.7
- pH (1%): 12.5
- Density: 1.279
- Surface tension: 33.6 mN/m


## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 2 to 10%
- Temperature: 20 to 65°C (68 to 149°F)
- Time: 30 sec. to 5 minutes

## PROCESS EXAMPLES:

- Cutting tools cleaning:

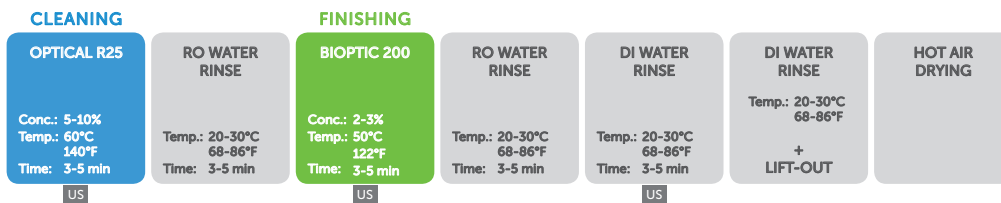

## BENEFITS:

- Fast removal of surfacing compounds
- Ensures optimum cleaning result due to its surfactants
- Universal cleaning in ultrasonic, spray or brush cleaning processes
- Easily rinsed off, does not leave a residual film

10/02/20

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

