



# DECOSPRAY SUPER

Non foaming liquid product, used in machined-parts for cleaning or pre-cleaning of the steel by ultrasonic and/or spray process.

## COMPATIBILITY:

- Sensitive steels
- Cuprous

## INGREDIENTS:

- Tensioactives, solubilising agents
- NTA-free product

## PHYSICAL AND CHEMICAL DATA:

- pH (1%): 8.4
- Density: 1.047
- Surface tension: 29.5 mN/m


## INSTRUCTIONS FOR USE:

Optimum use conditions may be affected by the quality of the water used in the baths, as well as the type and quantity of contaminants.

- Concentration: 1 to 3%
- Temperature: 60 to 75°C (140 to 167°F)
- Time: 2 to 3 minutes

## PROCESS EXAMPLES:

- Ultrasonic system:

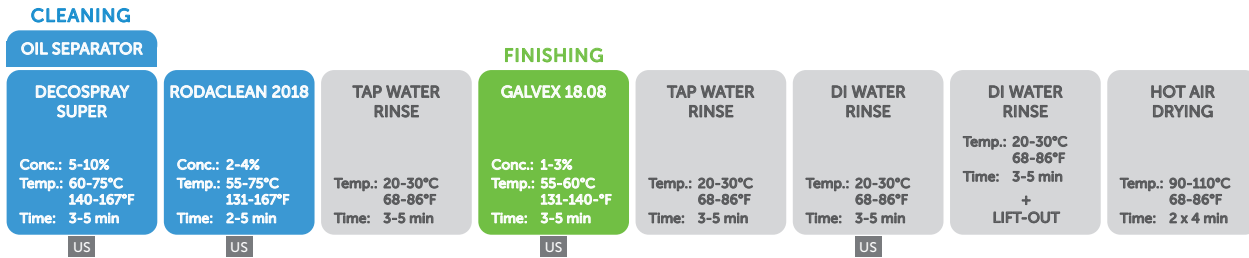

- Nettoyage par aspersion :



## BENEFITS:

- Rapid oil removing and separation
- Exceptional longevity steel protection against oxidation
- Can be used on copper alloys
- Efficient against corrosion (added in low concentration in the rinse water)

01/02/21

## STORAGE CONDITIONS:

- Keep the recipient hermetically sealed between 5°C and 20°C (41°F and 68°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

