



# ALLSTRIP

Universal solvent with a high flash point for the removal of glues, waxes, lacquers, setters cement, in ultrasonic process or in beakers.



## JEWELLERY RANGE

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning	Removal of setters cement, waxes, glues and lacquers

### COMPATIBILITY

- Stainless steel
  - Lead-free brass
  - Silver: 800 - 925 (sterling)
  - Gold: white, pink, yellow
  - Platinum
  - Rhodium, palladium
  - Stones\*:
    - Diamond, sapphire, ruby, emerald
    - Zirconium, ceramic
- \*Please contact NGL before implementing a process

### COMPONENTS

- No CMR compound, REACH compliant

### PHYSICO-CHEMICAL DATA

- pH concentrated: n.m.
- Density: 0.99
- Flash point: 88°C


### INSTRUCTIONS FOR USE\*

- Concentration: 100%
- Temperature: 20 to 50°C (not exceed 70°C)
- Time: 2 to 10 minutes



\*Use in a space that is naturally ventilated or equipped with an aspiration. system.

### PROCESS EXAMPLES

- Removal of glues, waxes, lacquers, setters cement, in beakers

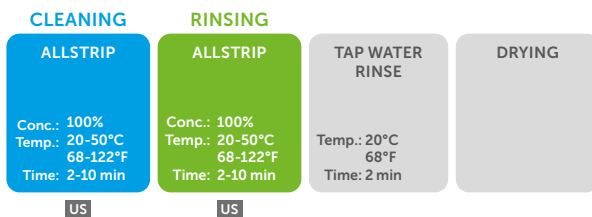

- Removal of contaminants in ultrasonic process

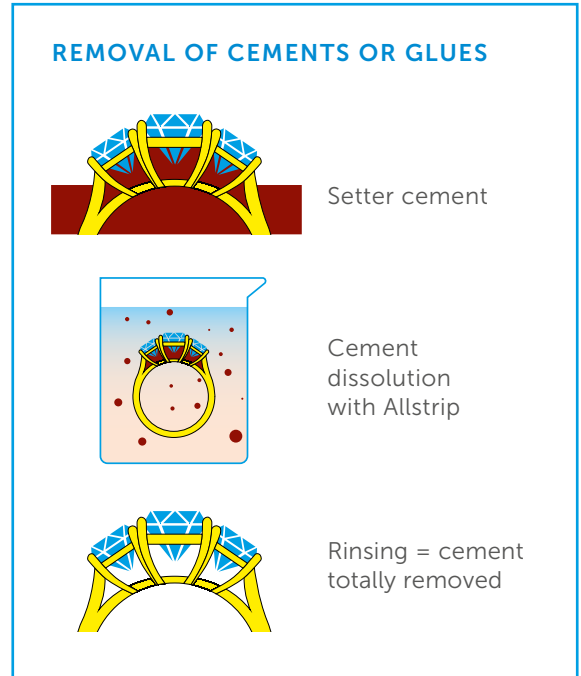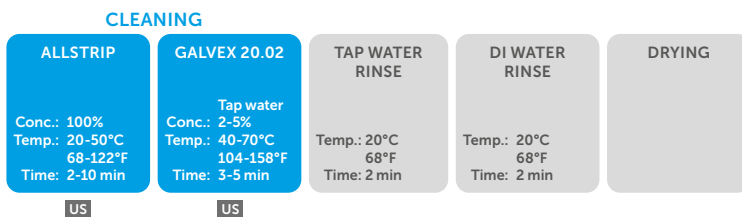

04/04/22

### STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (PEHD).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

