



DECOSPRAY™

Light alkaline product for the removal of neat oil in interoperation cleaning. Requires an oil separator.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Oil removal in spray or ultrasonic processes with an oil separator	Neat oils

COMPATIBILITY

- Stainless steel and tempered
- Copper alloys:
 - Brass
 - CuBe
 - Nickel silver
- Aluminium
- Gold: white, pink, yellow
- Rhodium, palladium

COMPONENTS

- Surfactants, chelating agents
- No CMR compounds, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 9.6
- Density: 1.12
- Surface tension: 39.7 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 2 to 5%
- Temperature: 40 to 70°C (104°F to 158°F)
- Time: 3 to 5 minutes

*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLES

- Interoperation cleaning


CLEANING

DECOSPRAY™	DECOSPRAY™	TAP WATER RINSE	TAP WATER RINSE	DI WATER RINSE	HOT AIR DRYING
Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	Temp.: 20-30°C 68-86°F Time: 1-2 min	Temp.: 20-30°C 68-86°F Time: 1-2 min	
Spray cleaning	Spray cleaning	Spray cleaning	Spray cleaning	Spray cleaning	

- Finishing cleaning

CLEANING

DECOSPRAY™	RODACLEAN 2018	TAP WATER RINSE	FINISHING GALVEX 20.02	TAP WATER RINSE	DI WATER RINSE	HOT AIR DRYING
Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	Temp.: 20-30°C 68-86°F Time: 1-2 min	
US	US		US		US	

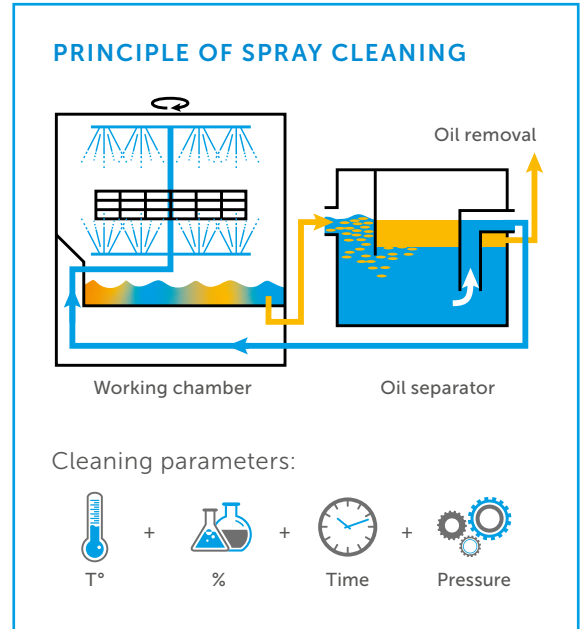

10/08/22

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (PEHD).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

