



GALVEX 18.08

Slightly alkaline liquid product used for hydrophobic finishing in ultrasonic process, prior to drying.



JEWELLERY RANGE

FUNCTION	APPLICATION/POLLUTION
Water-repellent, hydrophobic	Water

COMPATIBILITY

- Stainless steel
 - Lead-free brass
 - Silver: 800 - 925 (sterling)
 - Gold: white, pink, yellow
 - Platinum
 - Rhodium, palladium
 - Stones*:
 - Diamond, sapphire, ruby, emerald
 - Zirconium, ceramic
- *Please contact NGL before implementing a process.

COMPONENTS

- Surfactants, solubilising agent, chelating agents
- No CMR compound, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 9.5
- Density: 1.08
- Surface tension: 21.8 mN/m



A10 INSTRUCTIONS FOR USE*

- Concentration: 1 to 3%
- Temperature: 40 to 60°C (104 to 140°F)
- Time: 3 to 5 minutes

*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLE

- Hydrophobic finish

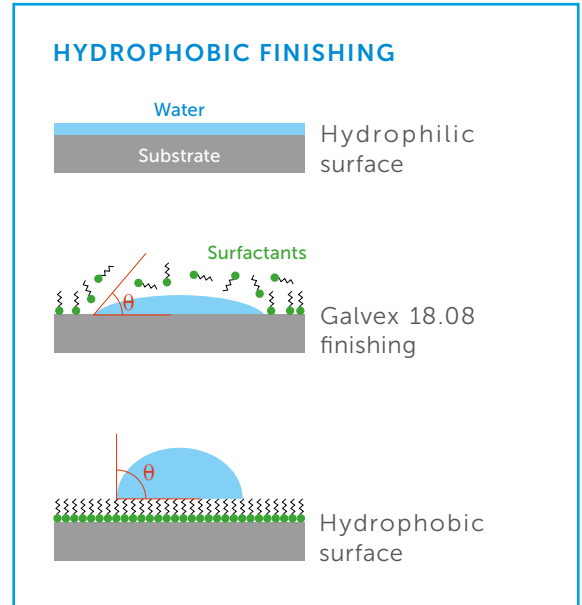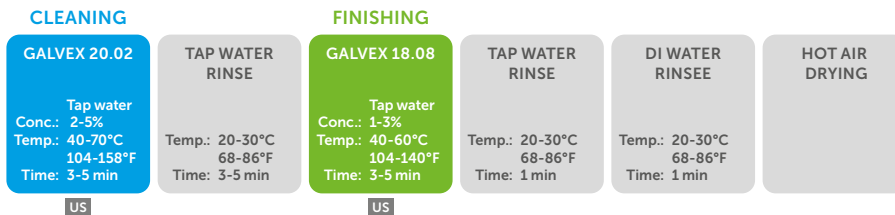

01/02/23

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

