



GALVEX 20.31

Alkaline liquid product for the removal of glues, lacquers or varnishes in ultrasonic process, as well as in surface preparation prior to electroplating or PVD.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning. Interoperation, finishing, surface preparation.	Soluble oils, polishing pastes, lacquers, glues or varnishes.

COMPATIBILITY

- Stainless steel and tempered – Aluminium
- Copper alloys:
 - Gold: white, pink, yellow
 - Rhodium, palladium
- Brass
- CuBe
- Nickel silver

COMPONENTS

- Surfactants, chelating agents, solvents
- No CMR compounds, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 10.08
- Density: 1.02
- Surface tension: 31.4 mN/m



INSTRUCTIONS FOR USE*

- Concentration: 2 to 5%
- Temperature: 50 to 70°C (122 to 158°F)
- Time: 2 to 5 minutes

*Dependent on the quality of water and the nature and quantity of contaminants.

PROCESS EXAMPLE

- Surface preparation prior to electroplating or PVD

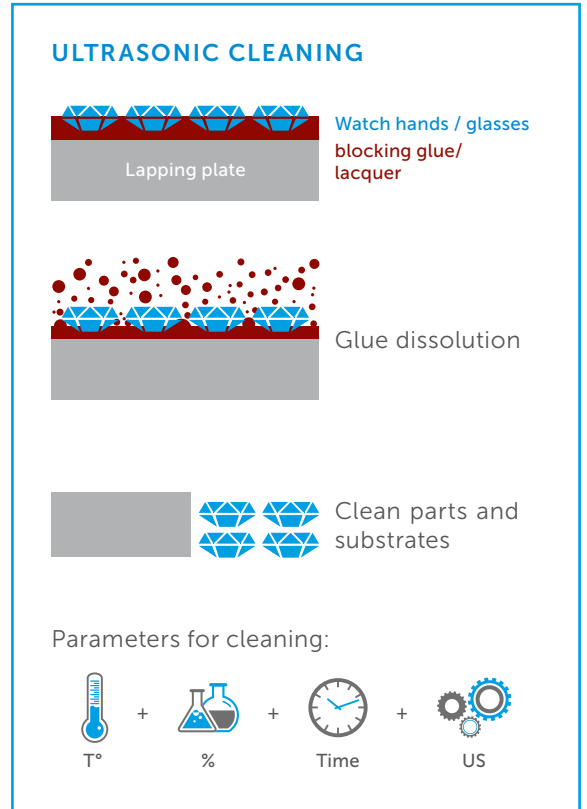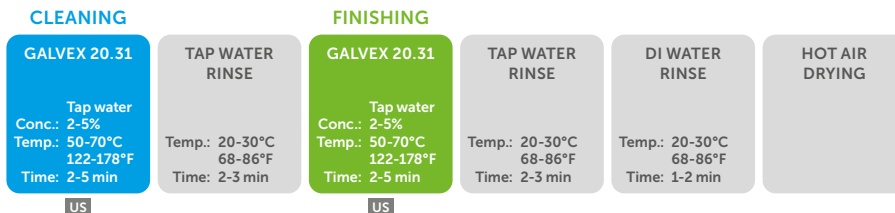

10/08/22

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

