



HELIT

Neutral universal detergent, with hydrophilic effect for superfinish of surfaces in ultrasonic process prior drying.



LUXURY ACCESSORIES RANGE

| FUNCTION | APPLICATION/POLLUTION |
|-------------------------|-----------------------|
| Hydrophilic superfinish | Light pollutions |

COMPATIBILITY

- Stainless steel
- Brass (leaded and unleaded)
- Rhodium, palladium
- Gold: white, pink, yellow
- ABS
- Aluminium
- Nickel silver

COMPONENTS

- Surfactants
- No phosphates, no NTA

PHYSICOCHEMICAL DATA

- pH concentrated: 6.9
- Density: 1.04
- Surface tension: 27.9 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 3 to 5%
- Temperature: 40 to 70°C
- Time: 2 to 4 minutes


*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLE

- Finishing cleaning

CLEANING

| | | | | | | |
|---|--|--|--|---|---|-----------------------|
| GALVEX 20.02 Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min US | TAP WATER RINSE Temp.: 20-30°C 69-86°F Time: 3-5 min | HELIT Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-4 min US | TAP WATER RINSE Temp.: 20-30°C 69-86°F Time: 3-5 min | DI WATER RINSE Temp.: 20-30°C 69-86°F Time: 3-5 min | DI WATER RINSE Temp.: 20-30°C 69-86°F Time: 3-5 min | HOT AIR DRYING |
|---|--|--|--|---|---|-----------------------|

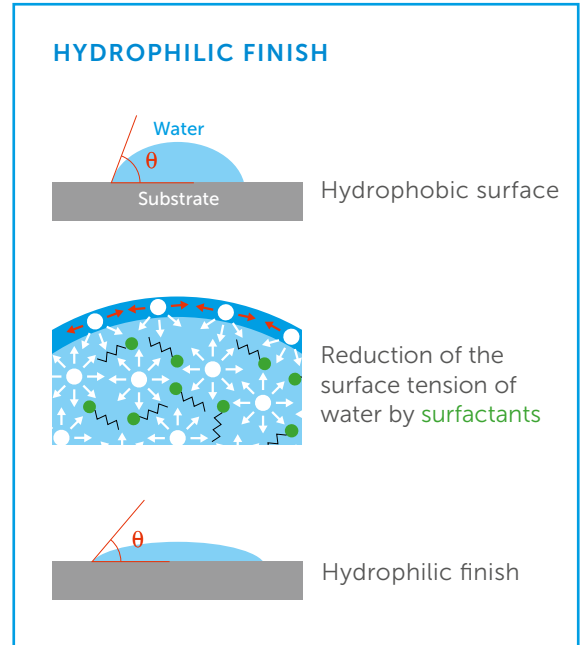

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (PEHD).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

