



HELIT

Light alkaline universal detergent with a hydrophilic superfinish on the surface in ultrasonic processes prior to drying.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Hydrophilic superfinish	Light pollutions

COMPATIBILITY

- Stainless steel and tempered
- Aluminium
- Gold: white, pink, yellow
- Rhodium, palladium
- Copper alloys:
 - Brass
 - CuBe
 - Nickel silver

COMPONENTS

- Surfactants
- No phosphates, no NTA

PHYSICOCHEMICAL DATA

- pH concentrated: 6.9
- Density: 1.04
- Surface tension: 27.9 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 3 to 5%
- Temperature: 40 to 70°C (104 to 158°F)
- Time: 2 to 4 minutes

*Dependent on the quality of water and the nature and quantity of contaminants.

PROCESS EXAMPLE

- Final cleaning


CLEANING

GALVEX 20.02 Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	TAP WATER RINSE Temp.: 20-30°C 69-86°F Time: 2-3 min	HELIT Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-4 min	TAP WATER RINSE Temp.: 20-30°C 69-86°F Time: 1-3 min	DI WATER RINSE Temp.: 20-30°C 69-86°F Time: 1-3 min	DI WATER RINSE Temp.: 20-30°C 69-86°F Time: 1-3 min	HOT AIR DRYING
-------------------------------------------------------------------------------------------------	----------------------------------------------------------------------	------------------------------------------------------------------------------------------	----------------------------------------------------------------------	---------------------------------------------------------------------	---------------------------------------------------------------------	-----------------------

US

US

HYDROPHILIC FINISH

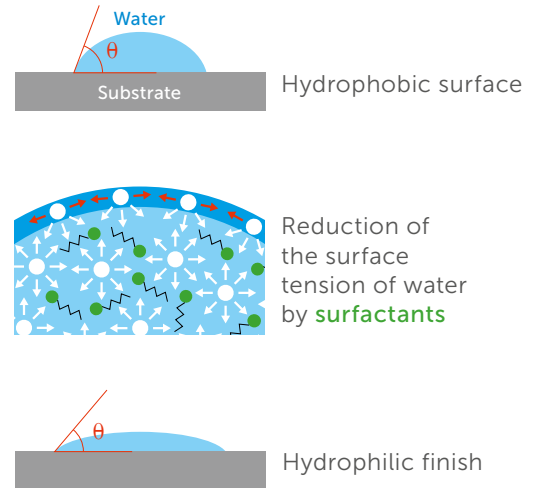

10/08/22

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

