



RUBIFIN N°4

A3 solvent for removal of neat oils, in vacuum or ultrasonic processes.



LUXURY ACCESSORIES RANGE

FUNCTION	APPLICATION/POLLUTION
Vacuum or ultrasonic cleaning	Neat oil

COMPATIBILITY

- Stainless steel
- Brass (leaded and unleaded)
- Zamak
- Gold: white, pink, yellow
- Rhodium, palladium
- Aluminium
- Nickel silver

COMPONENTS

- A3 solvent
- Hydrocarbon-free

PHYSICO-CHEMICAL DATA

- pH concentrated: n.m
- Density: 0.92
- Flash point: 71°C (160°F)
- Surface tension: 29.2 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 100%
- Temperature: 20 to 50°C (68°F to 122°F)
- Time: 3 to 10 minutes

Work in a well ventilated area or one equipped with an aspiration system.


PROCESS EXAMPLES

- Removal of oil in vacuum process

CLEANING	RINSING	DRYING
RUBIFIN N°4 Vacuum process Conc.: 100% Temp.: 20-50°C 68-122°F Time: 3-10 min	RUBIFIN N°4 Vacuum process Conc.: 100% Temp.: 20-50°C 68-122°F Time: 3-10 min	DRYING Vacuum process
US	US	

- Removal of oil in ultrasonic process

CLEANING				
RUBIFIN N°4 Conc.: 100% Temp.: 20-50°C 68-122°F Time: 3-10 min	GALVEX 20.02 Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	TAP WATER RINSE Temp.: 20°C 68°F Time: 2 min	DI WATER RINSE Temp.: 20°C 68°F Time: 2 min	HOT AIR DRYING
US	US			

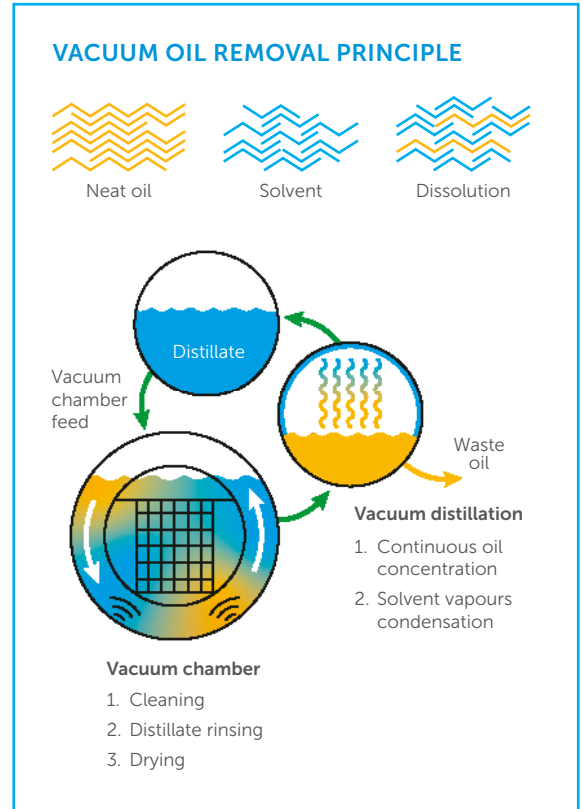

22/11/22

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (PEHD).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

