



RUBIFIN N°4

A3 solvent for removal of neat oils, in vacuum or ultrasonic processes.



MEDICAL RANGE

| FUNCTION | APPLICATION/POLLUTION |
|-------------------------------|-----------------------|
| Vacuum or ultrasonic cleaning | Neat oil |

COMPATIBILITY

- Stainless steel:
 - Austenitic
 - Martensitic
 - Precipitation hardening
- Ceramic
- Chromium - Cobalt
- Titanium

COMPONENTS

- A3 solvent
- Hydrocarbon-free

PHYSICOCHEMICAL DATA

- pH concentrated: n.m
- Density: 0.92
- Flash point: 71°C
- Surface tension: 29.2 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 100%
- Temperature: 20 to 50°C (68°F to 122°F)
- Time: 3 to 10 minutes

Work in a well ventilated area or one equipped with an aspiration system.


PROCESS EXAMPLES

- Removal of oil in vacuum process

| CLEANING | RINSING | DRYING |
|---|---|---------------------------------|
| RUBIFIN N°4 Vacuum process Conc.: 100% Temp.: 20-50°C 68-122°F Time: 3-10 min US | RUBIFIN N°4 Vacuum process Conc.: 100% Temp.: 20-50°C 68-122°F Time: 3-10 min US | DRYING Vacuum process |

- Removal of oil in ultrasonic process

| CLEANING | TAP WATER RINSE | DI WATER RINSE | HOT AIR DRYING |
|---|---|------------------------------------|------------------------------------|
| RUBIFIN N°4 Conc.: 100% Temp.: 20-50°C 68-122°F Time: 3-10 min US | GALVEX 20.02 Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min US | Temp.: 20°C 68°F Time: 2 min | Temp.: 20°C 68°F Time: 2 min |

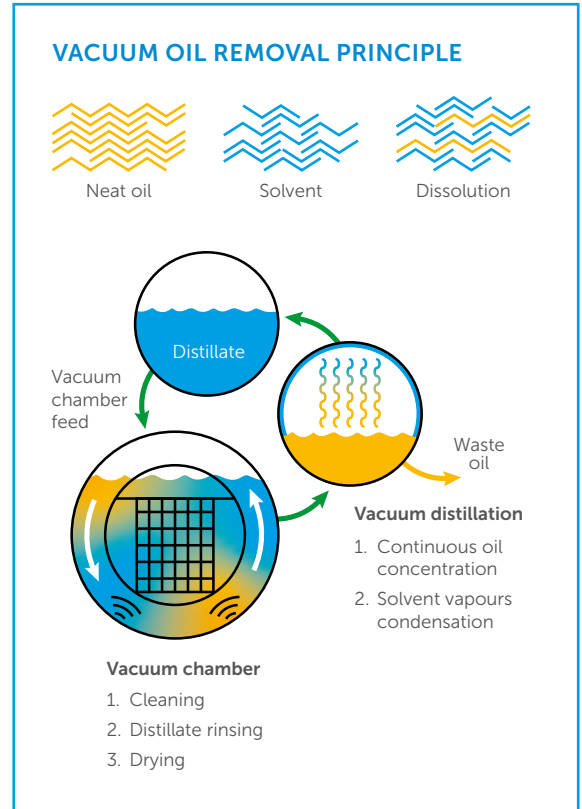

04/05/22

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (PEHD).

PRODUCT COMPATIBLE WITH VALIDATION STANDARDS

- Cleaning:
 - ISO 19227 - 2018
 - ASTM 3127 - 16



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

