



# SCHUTZLACK NGL BLEUE

Masking varnish for protection of surfaces during mechanical operations (machining, satin finishing) or thermal operations (laser engraving, welding). Resistant to solvents such as Allstrip and Rubifin.



## WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Protection lacquer	N.A.

### COMPATIBILITY

- All metals

### COMPONENTS

- Isopropanol, acetone
- Polymers, dye
- No CMR compounds, REACH compliant

### PHYSICOCHEMICAL DATA

- Not watersoluble
- Color: blue
- Density: 0.88
- Sec: 9.0 - 10.3
- Viscosity: 4-5 cP
- Flash point: 11°C

### INSTRUCTIONS FOR USE

Use 100%: room temperature

Use of the lacquer:

- Spraygun: spray the surface which needs protection from a distance of 10-20 cm, let the lacquer dry for 5-10 min depending on the layer amount.
- Dipping or paintbrush

### PROCESS EXAMPLES FOR ELIMINATION OF THE LACQUER

- Schutzlack removal from stainless steel


#### CLEANING

RODACLEAN 2018	TAP WATER RINSE	DI WATER RINSE	HOT AIR DRYING
Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	Temp.: 20-30°C 68-86°F Time: 1-2 min	

- Schutzlack removal from copper and sensitive steels

#### CLEANING

GALVEX 20.02	TAP WATER RINSE	DI WATER RINSE	HOT AIR DRYING
Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	Temp.: 20-30°C 68-86°F Time: 1-2 min	

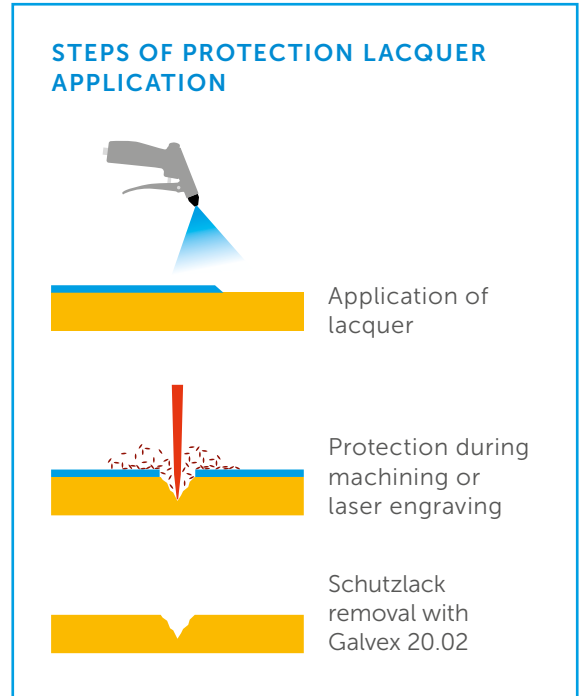

11/08/22

### STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (PEHD).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

### NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND  
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

