



BIOPTIC 201

Liquid acid product used in spray and ultrasonic processes for cleaning finishes.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
To neutralise and leave a hydrophilic finish	Alkaline, mineral, oxide residues

COMPATIBILITY

- Glass :
 - Acrylic
 - Mineral
 - Sapphire

COMPONENTS

- Organic acid
- Surfactants
- No CMR compounds, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 0.7
- Density: 1.21
- Surface tension: 40.2 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 0.5 to 2%
- Temperature: 40 to 65°C (104°F to 149°F)
- Time: 1 to 5 minutes


*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLES

- Cleaning of glasses in spray processes

CLEANING

Oil separator

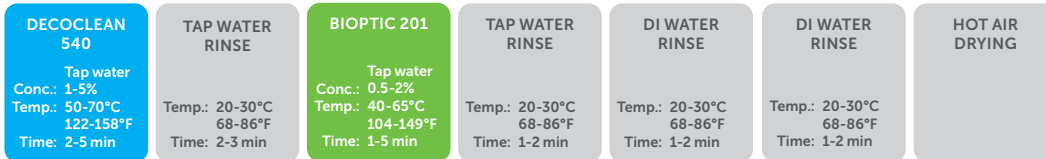


Spray cleaning

US

- Cleaning of glasses in ultrasonic processes

CLEANING


Oil separator

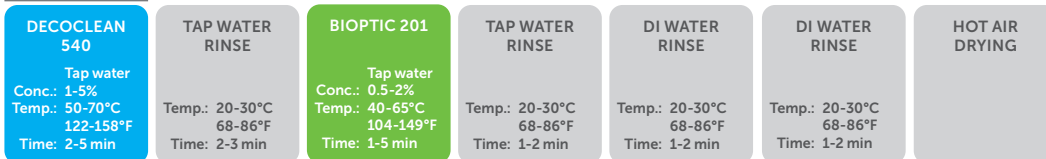

US

US

US

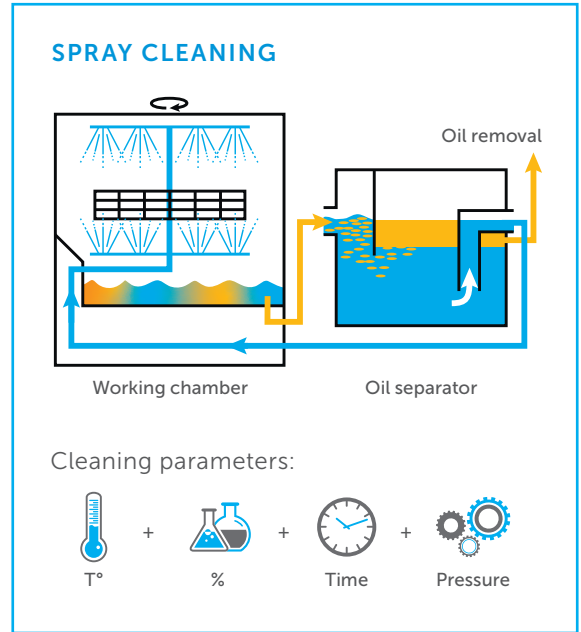

22/03/24

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

