



DECOCLEAN 540

Strong alkaline liquid for the removal of neat oil in interoperation cleaning. Requires an oil separator.



WATCH INDUSTRY

| FUNCTION | APPLICATION/POLLUTION |
|--|-----------------------|
| Oil removal in spray or ultrasonic processes with an oil separator | Neat oils, abrasives. |

COMPATIBILITY

- Steels
- Glass
 - Acrylic
 - Mineral
 - Sapphire

COMPONENTS

- Surfactants, chelating agents
- No CMR compounds, REACH compliant
- No phosphates

PHYSICO-CHEMICAL DATA

- pH concentrated: 13.9
- Density: 1.27
- Surface tension: 39.7 mN/m


INSTRUCTIONS FOR USE*

- Concentration: 1 to 5%
- Temperature: 50 to 70°C (122°F to 158°F)
- Time: 2 to 5 minutes



*Dependent on the quality of water and the nature and quantity of contaminants.

PROCESS EXAMPLES

- Interoperation cleaning

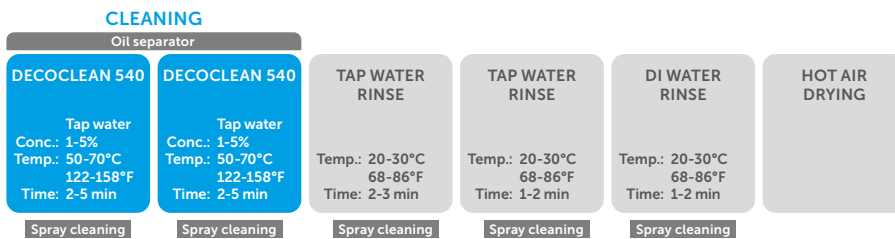

- Final cleaning

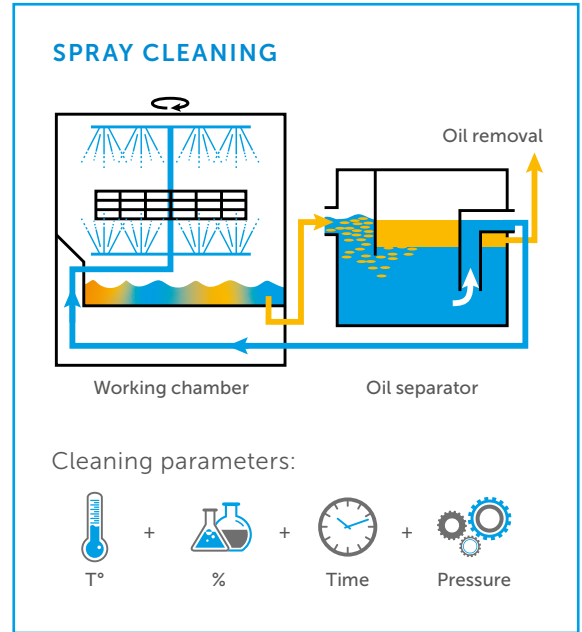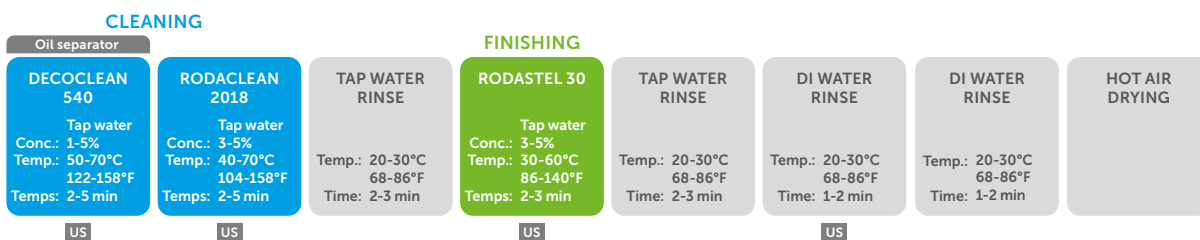

15/11/22

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

