







NEW BIOLOGICAL PARTS CLEANER

THE BENEFITS OF PARTS CLEANER

ENVIRONMENTALLY FRIENDLY & SOLVENT-FREE 2 EFFECTIVE

3 ECONOMICAL

Non-toxic and nonflammable solution No risk for the environment, no VOC release Efficient cleaning, with no residue on parts Consistent quality of cleaning over time

No regulatory restrictions to process upgrade. Limited maintenance, waste and reprocessing costs

Minimises maintenance and waste





Solvents and detergents

Biological parts cleaners





Regeneration by the tablet

Consumption and maintenance
















Waste and reprocessing






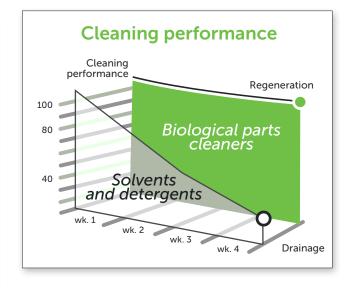





THE PROBLEM WITH SOLVENTS

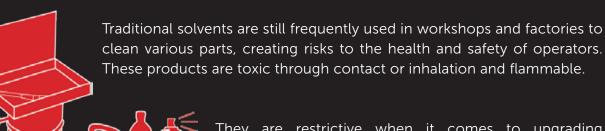

They are restrictive when it comes to upgrading facilities and eliminating waste. They are also a source of environmental hazard: accidental spills or release of volatile organic compounds (VOCs).









THE PARTS CLEANER PROCESS

The biological parts cleaner works with a **SoClean Liquid** with a solvent-free, non-toxic and environmentally friendly, pH neutral cleaning solution, heated at 38°C, and **SoClean Tabs**, microorganism tablets which break down oils and continuously regenerate the solution. This process guarantees **effective cleaning**, with no residue on the parts, and helps limit chemical **consumption, maintenance and waste.**



THE BIOLOGICAL PARTS CLEANER 40L The ergonomic design of this cleaner offers various cleaning and filtration systems and a user-friendly control unit.





CLEANING SOLUTION

An aqueous formula made up of specific, non-toxic and non-flammable surfactants that loosen and break down dirt.






A CONCENTRATE OF MICROORGANISMS Biodegradation of dirt, continuous purification of the cleaning bath.





The addition of the tablet enables the solution to regenerate and ensures consistent quality of cleaning.

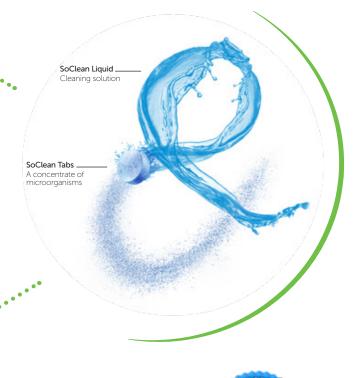



TECHNICAL FEATURES


| Parts washer dimensions | 820 x 530 x 1050 mm |
|--------------------------------|--|
| Cleaning table dimensions | 550 x 430 x 150 mm |
| Empty weight | 23 kg |
| Tank volume | 40 liters |
| Soaking tray | 4 liters / useable dimensions of the tray: 240 x 220 x 80 mm |
| Pump flow | adjustable from 0 to 6 litres/min + low flow tap |
| Heating power | 2 KW |
| Average electrical consumption | 150 W/H |
| Maximum load | 30 kg |
| Mobility | 4 wheels polyurethane, 1 with brake |
| Component | HDPE |
| Tools | Interchangeable brush |
| Filtration | Bag filter polypropylene 50 µm |
| Electrical | 230 V ≈ |



Ergonomic cleaning table



Electromechanical box can be dismantled without tools



Filter socks 50µm



Heating time from 15 to 38°C in 15 min



MOBILE MACHINE

Fountain with 4 wheels functioning when hot



HEATING SYSTEM

Heating time from 15 to 38°C in 15 min



EASY MAINTENANCE

Electromechanical box interchangeable without tools



ERGONOMIC CLEANING TABLE

dip-coating zone



DIP-COATING ZONE

Allows you to work as a background task

DEMONSTRATION:



VIDEO









