



SCHUTZLACK NGL BLEUE

Masking varnish for protection of surfaces during mechanical operations (machining, satin finishing) or thermal operations (laser engraving, welding). Resistant to solvents such as Allstrip and Rubifin.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Protection lacquer	Spraygun or paintbrush application, resistant to solvents and watersoluble in a detergent solution

COMPATIBILITY

- All metals

COMPONENTS

- Ethanol
- Polymers, dye
- No CMR compounds, REACH compliant

PHYSICOCHEMICAL DATA

- Not watersoluble
- Color: blue
- Density: 0.88
- Sec: 9.0 - 10.3
- Viscosity: 4-5 cP
- Flash point: 11°C

INSTRUCTIONS FOR USE

Use 100%: room temperature.

Use of the lacquer:

- Spraygun: spray the surface which needs protection from a distance of 10-20 cm, let the lacquer dry for 5-10 min depending on the layer amount.
- Dipping or paintbrush.

PROCESS EXAMPLES

- Schutzlack removal from stainless steel


CLEANING

RODACLIN 2018	TAP WATER RINSE	DI WATER RINSE	HOT AIR DRYING
Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	Temp.: 20-30°C 68-86°F Time: 1-2 min	

- Schutzlack removal from copper and sensitive steels

CLEANING

GALVEX 20.02	TAP WATER RINSE	DI WATER RINSE	HOT AIR DRYING
Tap water Conc.: 2-5% Temp.: 40-70°C 104-158°F Time: 3-5 min	Temp.: 20-30°C 68-86°F Time: 2-3 min	Temp.: 20-30°C 68-86°F Time: 1-2 min	

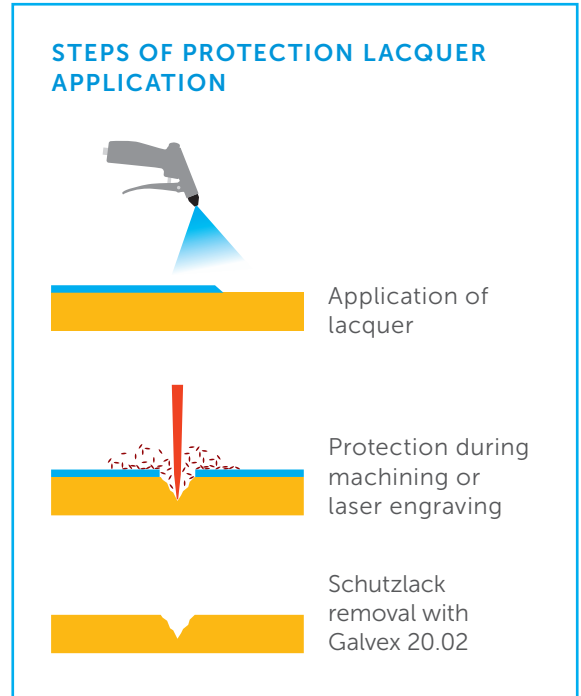

11/01/24

STORAGE CONDITIONS

- Protect from sunlight and do not expose to temperatures exceeding 50°C (122°F). Keep well away from all sources of ignition.
- The shelf life of the product is 24 months from the date of manufacture under the appropriate storage conditions.



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

