



# ALLSTRIP

Universal solvent with a high flash point for the removal of blocking glues and polishing pitch in an ultrasonic process or in beakers.



## PRECISION OPTICS RANGE

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning	Removal of blocking glues and polishing pitch

### COMPATIBILITY

- Photographic glasses:
  - Crown and Flint
  - Borosilicate
- UV/IR:
  - Chalcogenides
  - Fused Silica
  - Sapphire
- Calcium Fluoride and Magnesium
- Silicon (Si)
- Zinc selenide
- Zinc Sulfide
- Germanium

### COMPONENTS

- No CMR compounds, REACH compliant

### PHYSICO-CHEMICAL DATA

- pH concentrated: n.m.
- Density: 0.99
- Flash point: 88°C (190°F)


### INSTRUCTIONS FOR USE\*

- Concentration: 100%
- Temperature: 20 to 50°C (68 to 122°F) (do not exceed 70°C (158°F))
- Time: 2 to 10 minutes


\*Use in a space that is naturally ventilated or equipped with a fume extraction system.

### PROCESS EXAMPLES

- Removal of blocking glues and polishing pitch in beakers

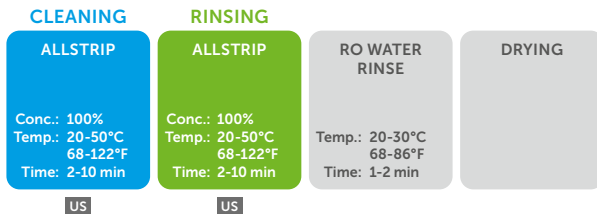

- Removal of polishing pitch, blocking glues, abrasives and final cleaning

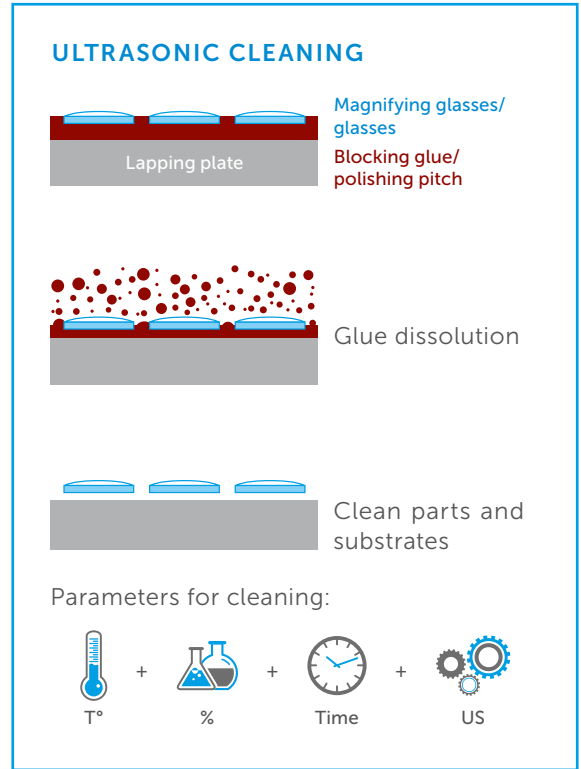

22/11/22

### STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

