



DECOMET

Citric acid based liquid product for the passivation of all grades of stainless steel. Removes iron oxides and accelerates the formation of a chromium passivation film.



WATCH INDUSTRY

| FUNCTION | APPLICATION/POLLUTION |
|-----------------------------|-----------------------|
| Soaking passivation process | Iron oxides |

COMPATIBILITY

- Stainless steel

COMPONENTS

- Citric acid, surfactants
- No CMR compounds, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 1
- Density: 1.17
- Surface tension: 31.2 mN/m


INSTRUCTIONS FOR USE*

- Concentration: 10 à 20%
- Temperature: 20 à 70°C
- Time: 4 to 20 minutes


*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLE

- Surface preparation before passivation

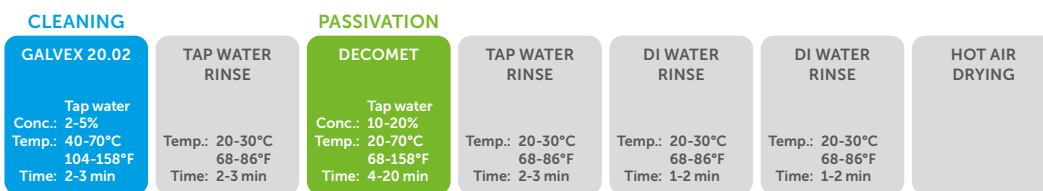

US

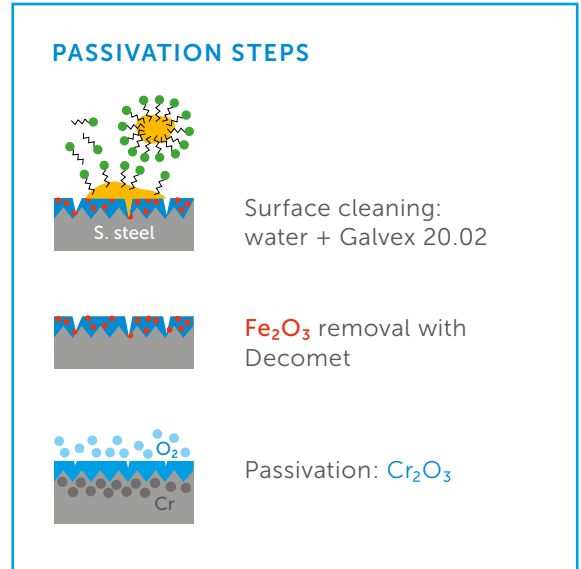

23/11/22

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

