



GALVEX 20.31

Alkali liquid product, for the removal of glues, lacquers or varnishes in ultrasonic process, as well as in surface preparation prior to electroplating or PVD.



LUXURY ACCESSORIES RANGE

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning, interoperation, finishing, surface preparation	Soluble oils, polishing pastes, lacquers, glues or varnishes

COMPATIBILITY

- Stainless steel
- Brass (leaded and unleaded)
- Gold: white, pink, yellow
- Rhodium, palladium
- Nickel silver

COMPONENTS

- Surfactants, chelating agents, solvents
- No CMR compound, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 10.08
- Density: 1.02
- Surface tension: 31.4 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 2 to 5%
- Temperature: 50 to 70°C (122 to 158°F)
- Time: 2 to 5 minutes



*Dependent on the quality of the water and the nature and quantity of contaminants.

STORAGE CONDITIONS

- Keep the recipient hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).

PROCESS EXAMPLE

- Surface preparation prior to electroplating or PVD

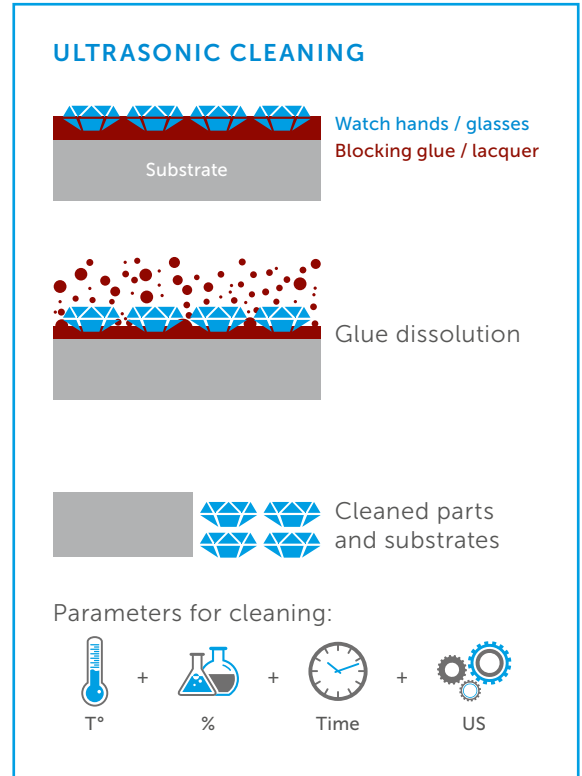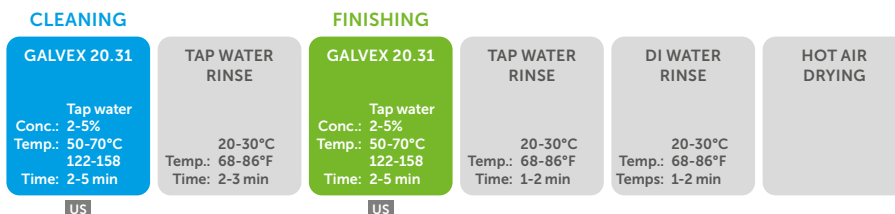

24/11/22



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

