



KORROSTOP 5000

Rinse additive for the protection of sensitive steel during cleaning and drying.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Rinse additive, protection against corrosion	Water

COMPATIBILITY

- Tempered and sensitive steels:
 - 20AP, Finmac, Invar, H1, etc.

COMPONENTS

- Anti-corrosion agents
- REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: 12.3
- Density: 0.98

INSTRUCTIONS FOR USE*

- Concentration: 0.02 to 0.1%
- Temperature: 20 to 30°C (68 to 86°F)
- Time: 1 to 3 minutes

*Dependent on the quality of the water and the nature and quantity of contaminants.

PROCESS EXAMPLES

- Cleaning of tempered steel parts

CLEANING


RODACLEAN 2018 Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-5 min US	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 2-3 min	KORROSTOP 5000 Tap water Conc.: 0.02-0.1% Temp.: 20-30°C 68-86°F Time: 1-3 min US	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 30 secs-1 min	HOT AIR DRYING
---	--	--	---	-----------------------

- Oil removal of sensitive steel parts

CLEANING

DECOCLEAN 540 Tap water Conc.: 1-5% Temp.: 50-70°C 122-158°F Time: 2-5 min US	RODACLEAN 2018 Tap water Conc.: 3-5% Temp.: 40-70°C 104-158°F Time: 2-5 min US	TAP WATER RINSE Temp.: 20-30°C 68-86°F Time: 2-3 min	KORROSTOP 5000 DI water Conc.: 0.02-0.1% Temp.: 20-30°C 68-86°F Time: 1-2 min US	HOT AIR DRYING
--	---	--	---	-----------------------

HYDROPHOBIC FINISHING

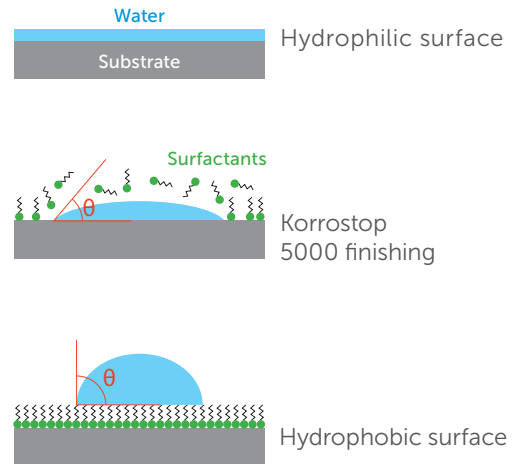

06/01/23

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND
 +41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

