



RUBIFIN N°10

Liquid product used in after-sales service to clean watch movements.



WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Cleaning of watch parts	Oils, grease, oxidation

COMPATIBILITY

- Stainless steel and tempered
- Aluminium
- Gold: white, pink, yellow
- Rhodium, palladium
- Copper alloys:
 - Brass
 - CuBe
 - Nickel silver

COMPONENTS

- Surfactants
- No CMR compounds, REACH compliant

PHYSICOCHEMICAL DATA

- pH concentrated: n.m
- Density: 0.91
- Flash point: 65°C
- Surface tension: 26.3 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 100%
- Temperature: 20°C (68°F)
- Time: 5 to 10 minutes

*Work in a well-ventilated area or one equipped with a fume extraction system.
ATEX machine (ATEX directive 2014/34/EU) if T° of use > (flash point -15°C).

PROCESS EXAMPLE

- Ultrasonic oil removal

CLEANING

RUBIFIN N°10

Conc.: 100%
Temp.: 20-55°C
68-131°F
Time: 3-9 min

US

RUBIFIN N°3

Conc.: 100%
Temp.: 20°C
68°F
Time: 5-10 min

RINSING

RUBIFIN N°3


Conc.: 100%
Temp.: 20°C
68°F
Time: 5-10 min

RUBIFIN N°3

Conc.: 100%
Temp.: 20°C
68°F
Time: 5-10 min

HOT AIR DRYING

RINSING SOLVENT

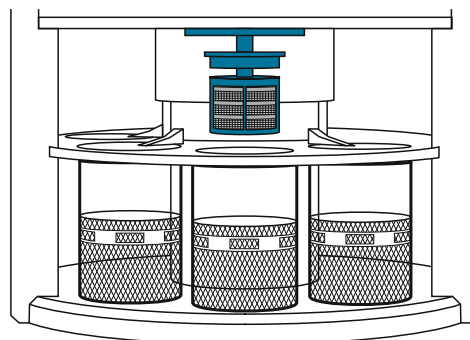

- Degreasing with Rubifin N°10
- Rinsing and drying with Rubifin N°3

29/11/22

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

