



# RUBIFIN N°3

Rinsing and drying solvent for use in servicing machine cleaning movements.



## WATCH INDUSTRY

FUNCTION	APPLICATION/POLLUTION
Rinsing solvent	Rinsing and drying of heavy solvent

### COMPATIBILITY

- Stainless steel and tempered
- Aluminium
- Gold: white, pink, yellow
- Rhodium, palladium
- Copper alloys:
  - Brass
  - CuBe
  - Nickel silver

### COMPONENTS

- Solvents
- No CMR compounds, REACH compliant

### PHYSICOCHEMICAL DATA

- pH concentrated: n.m
- Density: 0.80
- Flash point: 35°C
- Surface tension: 24 mN/m


### INSTRUCTIONS FOR USE\*

- Concentration: 100%
- Temperature: 20°C (68°F)
- Time: 5 to 10 minutes


\*Work in a well-ventilated area or one equipped with a fume extraction system. ATEX machine (ATEX directive 2014/34/EU) if T° of use > (flash point -15°C).

### PROCESS EXAMPLE

- Rinsing solvent

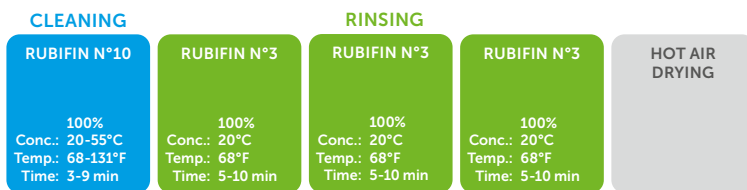

US

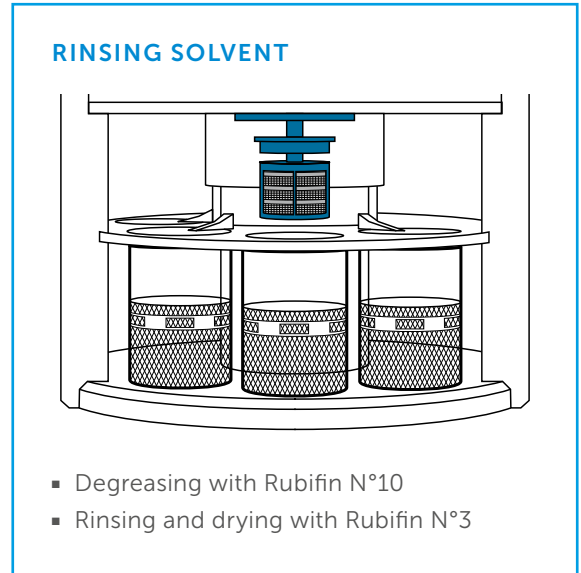

15/11/23

### STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

## NGL CLEANING TECHNOLOGY SA - ECOLOGICAL CLEANING SOLUTIONS

Chemin de la Vuarpillière 7 – CH-1260 NYON – SWITZERLAND  
+41 22 365 46 66 – contact@ngl-group.com – www.ngl-group.com

