



DECOSPRAY HK

Non-foaming alkaline liquid detergent to be used for the removal of surfacing compounds and marking inks in cleaning brush machines.



OPHTHALMIC OPTICS RANGE

FUNCTION	APPLICATION/POLLUTION
Cleaning brush machines	Surfacing compounds, marking inks

COMPATIBILITY

- Mineral glass*
- Organic glass

* Please contact NGL before implementing a process.

COMPONENTS

- Strong alkalis, surfactants
- Phosphates, chelating agents
- No CMR compounds, REACH compliant


PHYSICOCHEMICAL DATA

- pH concentrated: 11.7
- Density: 1.18
- Surface tension: 40.3 mN/m

INSTRUCTIONS FOR USE*

- Concentration: 5 to 10%
- Temperature: 50 to 60°C (122-140°F)
- Time: 1 to 4 minutes
- DECOSPRAY HK is used in addition to butyldiglycol.

*Dependent on the quality of water and the nature and quantity of contaminants.

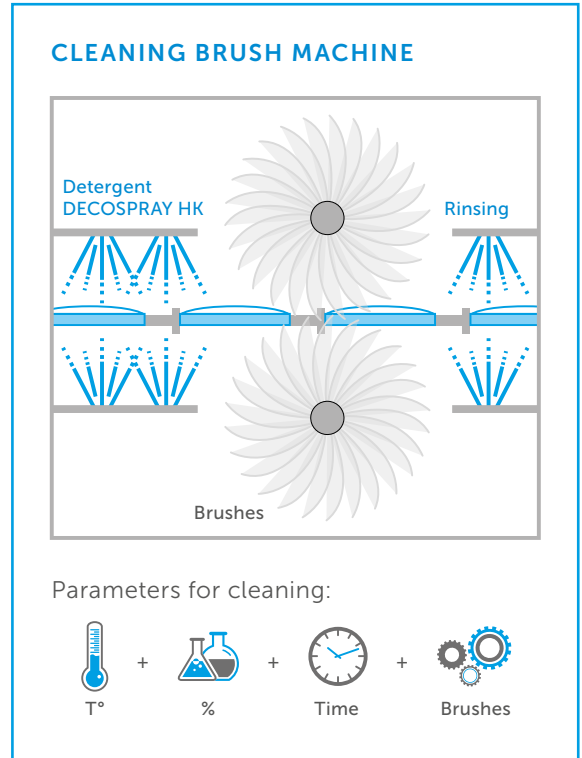

21/03/23

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).

PROCESS EXAMPLE IN BRUSH MACHINE

- Removal of surfacing compounds and marking inks

CLEANING

DECOSPRAY HK Conc.: 5-10% + Butyldiglycol 60% + Water 35% Temp.: 50-60°C 122-140°F Time: 1-4 min	DECOSPRAY HK Conc.: 5-10% + Butyldiglycol 60% + Water 35% Temp.: 50-60°C 122-140°F Time: 1-4 min	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min	HOT AIR DRYING
---	---	---	---	---	-----------------------

US

US



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

