



# RUBIFIN N°4

A3 solvent for removal of marking inks, glues and adhesives in ultrasonic processes.



## OPHTHALMIC OPTICS RANGE

FUNCTION	APPLICATION/POLLUTION
Ultrasonic processes	Marking inks, glue

### COMPATIBILITY

- Organic glass (low and high index)
- Polycarbonate

### COMPONENTS

- A3 solvent
- Hydrocarbon-free

### PHYSICOCHEMICAL DATA

- pH concentrated: n.m.
- Density: 0.92
- Flash point: 71°C
- Surface tension: 29.2 mN/m

### INSTRUCTIONS FOR USE\*

- Concentration: 100%
- Temperature: 20 to 50°C (68°F to 122°F)
- Time: 3 to 10 minutes

Work in a well-ventilated area or one equipped with a fume extraction system.


\* Dependent on the quality of water and the nature and quantity of contaminants.

### PROCESS EXAMPLE

- Cleaning of organic glasses or polycarbonates

#### CLEANING

<b>RUBIFIN N°4</b> Conc.: 100% Temp.: 20-50°C 68-122°F Time: 3-10 min US	<b>OPTICAL 2010</b> RO or DI water Conc.: 30-50 g/L Temp.: 50-55°C 122-131°F Time: 3-5 min US	<b>TAP WATER RINSE</b> Temp.: 20-30°C 68-86°F Time: 2-3 min	<b>DI WATER RINSE</b> Temp.: 20-30°C 68-86°F Time: 2-3 min	<b>DI WATER RINSE</b> Temp.: 20-30°C 68-86°F Time: 1-2 min	<b>HOT AIR DRYING</b>
---	---	--	---	---	-----------------------

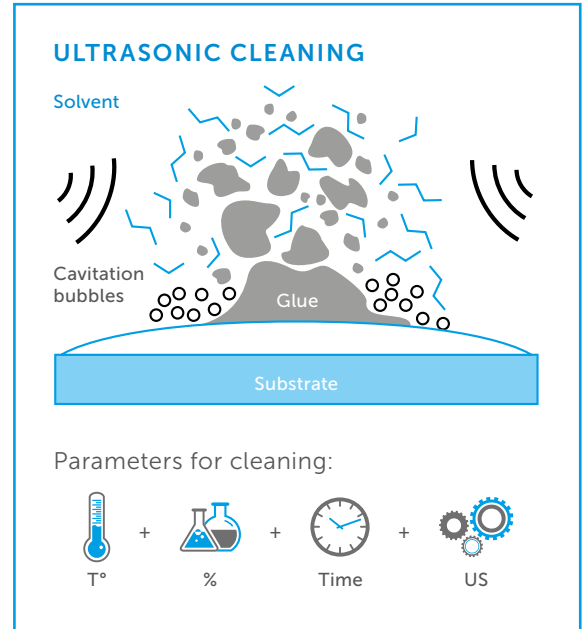

23/03/23

### STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

