



STRIPCOAT AR

Liquid detergent for stripping multilayer anti-reflection coating.



OPHTHALMIC OPTICS RANGE

FUNCTION	APPLICATION/POLLUTION
Ultrasonic cleaning	Stripping of multilayer anti-reflection coating

COMPATIBILITY

- Organic glass
- Stainless steel

COMPONENTS

- Ammonium bifluoride
- Organic acid
- Does not contain nitric acid

PHYSICOCHEMICAL DATA

- pH concentrated: 3.8
- Density: 1.17

INSTRUCTIONS FOR USE*

- Concentration: 5 to 20%
- Temperature: 45 to 65°C (113°F to 149°F)
- Time: 2 to 10 minutes

CAUTION: the product must be used imperatively in a plastic tank (PVC/PP/PE). Do not use a metal or glass container.

* Dependent on the quality of water and the nature and quantity of contaminants.


PROCESS EXAMPLE

- Stripping of multilayer anti-reflection coating

STRIPPING

STRIPCOAT AR RO or DI water Conc.: 5-20% Temp.: 45-65°C 113-149°F Time: 2-10 min	RO WATER RINSE Temp.: 20-30°C 68-86°F Time: 2-3 min	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 2-3 min	DI WATER RINSE Temp.: 20-30°C 68-86°F Time: 1-2 min	HOT AIR DRYING
--	---	---	---	-----------------------

US

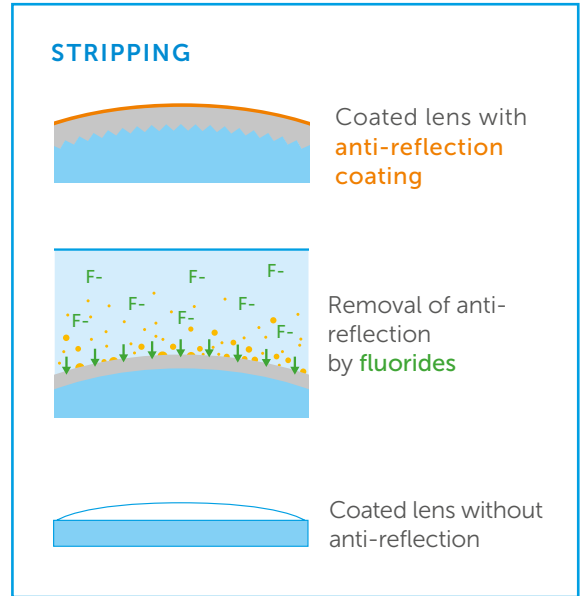

STORAGE CONDITIONS

- Keep the container hermetically sealed between 5°C and 40°C (41°F and 104°F) in a dry place.
- Always keep in packaging made from the same material as the original packaging (HDPE).



If you have any questions, please contact our Application Centre on: +41 22 365 46 66

